



Electrical Product Catalogue 2020

Electrical Intelligence to Save Energy and Live Easier

Special Edition

Connect directly with global suppliers
expo.tuya.com



Contents

Plugs & Power Strips.....	2
Smart Switch.....	68
Dimmer Switch.....	107
Curtain Switch.....	121
Module Controllers.....	131
Irrigator.....	140
Garage Door Opener.....	144

[Back to Table of Contents →](#)

Smart Outdoor Plug

[Register and inquire to learn more →](#)



Voice & Remote Control

The outdoor smart plug compatible with Amazon Alexa and Google Assistant for voice control.
Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi.




Upgraded 2 in 1 Outlets

2 AC outlets with Waterproof Button Cap design, protects module from dirt and debris when not in use. 15 A/ 1875 W Max for each



App/ Voice Control

2 appliances independently or together



Set Timers

You can also set automatic daily timers or create on/off so that your devices can turn on and off on their own



IP44 waterproof, FCC/ RoHS certified



With ABS fireproof material and splash-proof design, features weather and impact resistant housing withstands damp or wet conditions



Certificate: ETL/ FCC/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%–95%

Product Dimensions: 105.5 x 80 x 37 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Outdoor Plug

[Register and inquire to learn more →](#)



Voice & Remote Control

The outdoor smart plug compatible with Amazon Alexa and Google Assistant for voice control. Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi.




Upgraded 2 in 1 Outlets

2 AC outlets with Waterproof Button Cap design, protects module from dirt and debris when not in use. 15 A/ 1875 W Max for each



App/ Voice Control

2 appliances independently or together



Set Timers

You can also set automatic daily timers or create on/off so that your devices can turn on and off on their own



IP44 waterproof, FCC/ RoHS certified



With ABS fireproof material and splash-proof design, features weather and impact resistant housing withstands damp or wet conditions



Certificate: ETL/ FCC/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110-240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%-95%

Product Dimensions: 105.5 x 84.2 x 37 mm

Sales Area: Global

[Back to Table of Contents →](#)

SOP03 U.S. Regulatory 3–point Control Waterproof Socket

[Register and inquire to learn more →](#)



Voice & Remote Control

The outdoor smart plug compatible with Amazon Alexa and Google Assistant for voice control.
Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi.



Upgraded 2 in 1 Outlets

2 AC outlets with Waterproof Button Cap design, protects module from dirt and debris when not in use. 15 A/ 1875 W Max for each



App/ Voice Control

2 appliances independently or together



Set Timers

You can also set automatic daily timers or create on/off so that your devices can turn on and off on their own



IP44 waterproof, FCC/ RoHS certified



With ABS fireproof material and splash-proof design, features weather and impact resistant housing withstands damp or wet conditions



Certificate: FCC/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%–95%

Product Dimensions: 105.5 x 100 x 40 mm

Sales Area: Global

[Back to Table of Contents →](#)

Waterproof Socket

[Register and inquire to learn more →](#)



Voice & Remote Control

The outdoor smart plug compatible with Amazon Alexa and Google Assistant for voice control.
Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi.




Upgraded 2 in 1 Outlets

2 AC outlets with Waterproof Button Cap design, protects module from dirt and debris when not in use. 15 A/ 1875 W Max for each



App/ Voice Control

2 appliances independently or together



Set Timers

You can also set automatic daily timers or create on/off so that your devices can turn on and off on their own



IP44 waterproof, FCC/ RoHS certified



With ABS fireproof material and splash-proof design, features weather and impact resistant housing withstands damp or wet conditions



Certificate: CE/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: EU Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%–95%

Product Dimensions: 109 x 99.8 x 55 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Outdoor Plug

[Register and inquire to learn more →](#)



Voice & Remote Control

The outdoor smart plug compatible with Amazon Alexa and Google Assistant for voice control.
Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi.




Upgraded 2 in 1 Outlets

2 AC outlets with Waterproof Button Cap design, protects module from dirt and debris when not in use. 15 A/ 1875 W Max for each



App/ Voice Control

2 appliances independently or together



Set Timers

You can also set automatic daily timers or create on/off so that your devices can turn on and off on their own



IP44 waterproof, FCC/ RoHS certified



With ABS fireproof material and splash-proof design, features weather and impact resistant housing withstands damp or wet conditions



Certificate: CE/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: EU Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%–95%

Product Dimensions: 109 x 99.8 x 55 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Outdoor Plug

[Register and inquire to learn more →](#)




Voice control & 1%-100% dimming



This dimmer smart plug can adjust brightness level from 0-100% with Alexa and Google Assistant voice assistants



No hub required & remote control.
Note: It only supports 2.4 GHz Wi-Fi network, not support 5.0 GHz Wi-Fi



Schedule & sunset mode, create customized schedule or a lighting scene to automatically turn on/off. Support sunrise and sunset setting



Create group & share control: By creating a group for all Wi-Fi smart plugs, you can control combine devices in one command. Device sharing feature allows you to share the control with your family



IP44 waterproof, with ABS fireproof material



Certificate: FCC/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 50°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 110-240 V AC, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Wall Mounted Installation

Max Wattage: 125 V

Material: PC + ABS

Operation Humidity: RH 5%-95%

Product Dimensions: 180 x 120 x 45 mm

Sales Area: Global


[Back to Table of Contents →](#)

80 x 80 Style Smart Wall Socket

[Register and inquire to learn more →](#)




Mobile remote control



Sharing



Timing



Overload protection



Countdown



ON/ OFF physical keys



Certificate: FCC/ CE/ RoHS

Max Current: 16 A (Max)

Working Temperature: -20°C to 75°C

Standards: EU Market

Protocol: Wi-Fi

IP Degree of Protection: Bayer Class I Fire Protection

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Wall Mounted Installation

Max Wattage: 2500 W (Max)

Material: Plastic

Operation Humidity: RH < 95%

Product Dimensions: 80 x 80 x 57.2 mm

Sales Area: Global


[Back to Table of Contents →](#)

US 120 Style Wi-Fi Smart Wall Socket


[Register and inquire to learn more →](#)




Mobile remote control



Sharing



Timing



Overload protection



Countdown



ON/ OFF physical keys



Two outlets design



TR design



Certificate: ETL/ CE/ RoHS

Max Current: 15 A (Max)

Working Temperature: -20°C to 75°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: Bayer Class I Fire Protection

Voltage: 110-150 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Wall Mounted Installation

Max Wattage: Single 1500 W Total 2500 W

Material: Plastic

Operation Humidity: RH < 95%

Product Dimensions: 125 x 80 x 42.3 mm

Sales Area: Global


[Back to Table of Contents →](#)

Portable Wi-Fi Smart Plug

[Register and inquire to learn more →](#)




Mobile remote control




Timing



Countdown



Sharing



Overload protection



USB charging port (5 V/ 1 A)



Certificate: FCC/ CE/ RoHS

Max Current: 10 A (Max)

Working Temperature: -20°C to 75°C

Standards: EN Standard

Protocol: Wi-Fi

IP Degree of Protection: Bayer Class I Fire Protection

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Wall Mounted Installation

Max Wattage: 2200 W

Material: Plastic

Operation Humidity: RH 10%–80%

Product Dimensions: 73 x 69 x 36.5 mm

Sales Area: Global


[Back to Table of Contents →](#)

UK Smart Wall Socket With Double USB


[Register and inquire to learn more →](#)




Mobile remote control



Sharing



Timing



Overload protection




Countdown



ON/ OFF physical keys



Double power point design



Double USB charger



Certificate: ETL/ CE/ RoHS

Max Current: 13 A (Max)

Working Temperature: -20°C to 75°C

Standards: UK Standard

Protocol: Wi-Fi

IP Degree of Protection: Bayer Class I Fire Protection

Voltage: 100-250 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Wall Mounted Installation

Max Wattage: 2500 W (Max)

Material: Plastic

Operation Humidity: RH < 95%

Product Dimensions: 150 x 90 x 38.3 mm

Sales Area: Global


[Back to Table of Contents →](#)

Wi-Fi US Smart Plug


[Register and inquire to learn more →](#)




APP remote control



Current power display



Timer function



Support third party platform Amazon ECHO and Google HOME



Countdown function



Certificate: CE/ FCC/ RoHS

Max Current: 15 A (Max)

Working Temperature: 0°C to 40°C (32°F to 104°F)

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 85–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug and Play

Max Wattage: /

Material: PC + ABS

Operation Humidity: RH 20%–86%

Product Dimensions: 44 x 44 x 50 mm

Sales Area: Global


[Back to Table of Contents →](#)

Smart Plug – 16 A FR

[Register and inquire to learn more →](#)




APP remote control



Timer function



Countdown function



Current power display



Support third party platform Amazon ECHO and Google HOME



Certificate: CE/ FCC/ RoHS/ TUV

Max Current: 16 A (Max)

Working Temperature: 0°C to 40°C (32°F to 104°F)

Standards: FR Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 85–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug and Play

Max Wattage: /

Material: PC + ABS

Operation Humidity: RH 20%–85%

Product Dimensions: 71 x 45 x 45 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Wall Outlet

[Register and inquire to learn more →](#)




Wi-Fi 15 A tamper resistant




1000 W incandescent



Resistive




Duplex receptacle




5 A electronic ballast




1/2 HP motor



120 V AC, 60 Hz



1200 VA standard ballast, 1800 W (15 A)



2.4 GHz



Certificate: UL/ RoHS

Max Current: 15 A

Working Temperature: /

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 120 V AC, 60 Hz

Operation Environment: Indoor

Mounting Support: In-Wall Installation

Max Wattage: /

Material: PC Cover + Copper Accessary

Operation Humidity: /

Product Dimensions: 111 x 51.5 x 45.8 mm

Sales Area: South America/ Canada

[Back to Table of Contents →](#)

US Outdoor Smart Plug x 1 Socket

[Register and inquire to learn more →](#)



1-outlet outdoor Wi-Fi socket



W/ countdown function



125 V~, 60 Hz, 15 A/ 1875 W resistive,
8 A/ 1000 W tungsten




App remote control



W/ manual ON/ OFF button



Works with Alexa and
Google Assistant



Up to 15 ON/ Off daily



Certificate: ETL

Max Current: 15 A (Max)

Working Temperature: -20°C to 60°C

Standards: BNC-60/ U151T

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Plug in the Socket

Max Wattage: 125 V

Material: Plastic

Operation Humidity: /

Product Dimensions: 46.1 x 36.5 x 100 mm

Sales Area: USA

[Back to Table of Contents →](#)

US Outdoor Smart Plug x 2 Socket

[Register and inquire to learn more →](#)



1-outlet outdoor Wi-Fi socket



W/ countdown function




125 V~, 60 Hz, 15 A/ 1875 W resistive,
8 A/ 1000 W tungsten




App remote control



W/ manual ON/ OFF button



Works with Alexa and
Google Assistant



Up to 15 ON/ Off daily



Certificate: ETL

Max Current: 15 A (Max)

Working Temperature: -20°C to 60°C

Standards: BNC-60/ U151T

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Plug in the Socket

Max Wattage: 125 V

Material: Plastic

Operation Humidity: /

Product Dimensions: 75.7 x 40 x 99 mm

Sales Area: USA

[Back to Table of Contents →](#)

US Outdoor Smart Plug x 3 Socket

[Register and inquire to learn more →](#)



1-outlet outdoor Wi-Fi socket



W/ countdown function




125 V~, 60 Hz, 15 A/ 1875 W resistive,
8 A/ 1000 W tungsten




App remote control



W/ manual ON/ OFF button



Works with Alexa and
Google Assistant



Up to 15 ON/ Off daily



Certificate: ETL

Max Current: 15 A (Max)

Working Temperature: -20°C to 60°C

Standards: BNC-60/ U130T

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Outdoor

Mounting Support: Plug in the Socket

Max Wattage: 125 V

Material: Plastic

Operation Humidity: /

Product Dimensions: 110 x 38 x 1396 mm

Sales Area: USA

[Back to Table of Contents →](#)

Universal Smart Plug

[Register and inquire to learn more →](#)



Surge protection



Universal socket



Material: PC V0 fire retardant



Wi-Fi version: 2.4 GHz, 802.11 b/ g/ n



Certificate: CE/ RoHS

Max Current: 10 A (Max)

Working Temperature: /

Standards: EN Standard

Protocol: Wi-Fi

IP Degree of Protection: IP55

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: 2400 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: Southeast Asia


[Back to Table of Contents →](#)

EU Smart Plug 16 A with Energy Monitor

[Register and inquire to learn more →](#)



Energy monitor function



Overload function



Certificate: CE/ RoHS

Max Current: 16 A (Max)

Working Temperature: /

Standards: EN Standard

Protocol: Wi-Fi

IP Degree of Protection: IP55

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: 3840 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: Southeast Asia/ EU


[Back to Table of Contents →](#)

India 16 A Plug with Energy Monitor

[Register and inquire to learn more →](#)



Energy monitor function



Overload function



Certificate: CE/ RoHS

Max Current: 16 A (Max)

Working Temperature: /

Standards: EN Standard

Protocol: Wi-Fi

IP Degree of Protection: IP55

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: 3840 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: Southeast Asia/ EU

[Back to Table of Contents →](#)

BR Smart Power Strip – 16 A

[Register and inquire to learn more →](#)



Wi-Fi enable



Timing



Device sharing



Mobile remote control



Countdown



Works with Amazon Alexa,
Google Assistant, and Yandex Alice



Voice control



Certificate: Anatel

Max Current: 10 A

Working Temperature: 0°C to 40°C

Standards: Brazil

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 2400 W

Material: Flame retarding UL94V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 253 x 64 x 37 mm

Sales Area: Brazil


[Back to Table of Contents →](#)

BR Smart Wi-Fi Plug

[Register and inquire to learn more →](#)



Wi-Fi enable



Timing



Device sharing



Mobile remote control



Countdown



Energy monitoring



Voice control



Certificate: Anatel

Max Current: 16 A

Working Temperature: 0°C to 40°C

Standards: Brazil

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 4000 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 84 x 38 x 62 mm

Sales Area: Brazil


[Back to Table of Contents →](#)

Smart Wi-Fi Plug Mini, 15 A with Energy Monitoring, Space-saving Design, PSE and TELEC Certificate

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: PSE/ TELEC

Max Current: 15 A

Working Temperature: 0°C to 40°C

Standards: Japan/ Southeast Asia

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 100–125 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 1875 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 75 x 38 x 47 mm

Sales Area: Japan/ Southeast Asia


[Back to Table of Contents →](#)

Universal Smart Wi-Fi Plug, 15 A with Energy Monitoring

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: /

Max Current: 15 A

Working Temperature: 0°C to 40°C

Standards: Global

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 3750 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 60 x 50 x 46 mm

Sales Area: Global


[Back to Table of Contents →](#)

Universal Smart Wi-Fi Power Strip

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: /

Max Current: 10 A

Working Temperature: 0°C to 40°C

Standards: Global

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 2500 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 270 x 59 x 33 mm

Sales Area: Global


[Back to Table of Contents →](#)

EU Smart Wi-Fi Plug (Square)

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: CE/ RoHS

Max Current: 16 A

Working Temperature: 0°C to 40°C

Standards: Europe

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 220–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 4000 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 46 x 46 x 83 mm

Sales Area: Europe


[Back to Table of Contents →](#)

EU Smart Wi-Fi Plug (Round)

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: CE/ RoHS

Max Current: 16 A

Working Temperature: 0°C to 40°C

Standards: Europe

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 220–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 4000 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 52 x 52 x 83 mm

Sales Area: Europe


[Back to Table of Contents →](#)

EU Smart Wi-Fi Plug 2 in 1

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: CE/ RoHS

Max Current: 13 A

Working Temperature: 0°C to 40°C

Standards: Europe

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 220–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 3250 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 105 x 50 x 84 mm

Sales Area: Europe


[Back to Table of Contents →](#)

EU Smart Wi-Fi Plug (Compatible with FR)

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: CE/ RoHS

Max Current: 16 A

Working Temperature: 0°C to 40°C

Standards: EU (Compatible with FR)

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 220–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 4000 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 46 x 46 x 83 mm

Sales Area: Europe


[Back to Table of Contents →](#)

UK Smart Wi-Fi Plug

[Register and inquire to learn more →](#)



Wi-Fi enable



Controlling distance:
no distance limit



Voice control, timing & countdown,
group control & sharing



Mobile remote control



Works with Amazon
Alexa and Google Home



Energy monitoring



Wireless type:
Wi-Fi 2.4G 1T1R radio



Certificate: CE/ RoHS

Max Current: 13 A

Working Temperature: 0°C to 40°C

Standards: UK

Protocol: Wi-Fi

IP Degree of Protection: Non-waterproof

Voltage: 220–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: No

Max Wattage: 3250 W

Material: Flame retarding V0 class ABS + PC

Operation Humidity: RH ≤ 80%

Product Dimensions: 62 x 50 x 55 mm

Sales Area: UK

[Back to Table of Contents →](#)

Smart Plug

[Register and inquire to learn more →](#)




Single smart plug



Remote monitor



Decorative side drawbench design



Compact size



Certificate: ETL/ FCC

Max Current: 15 A (Max)

Working Temperature: Room temperature

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: North America

[Back to Table of Contents →](#)

Smart Plug DR-2052

[Register and inquire to learn more →](#)




Outdoor 2 smart sockets



Remote monitor



Suitable for all season weather proof



Compact size



Certificate: ETL/ FCC

Max Current: 15 A (Max)

Working Temperature: -25°C to room temperature

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP44

Voltage: 125 V AC, 50/ 60 Hz

Operation Environment: Outdoor/ Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: North America

[Back to Table of Contents →](#)

Power Board DR-1707


[Register and inquire to learn more →](#)



Surge protected



Remote monitor



Compact size



Individually control socket



Certificate: ETL/ FCC

Max Current: 15 A (Max)

Working Temperature: Room temperature

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: North America

[Back to Table of Contents →](#)

Power Board DR-1708


[Register and inquire to learn more →](#)




Surge protected



Wider space outlet



USB 5 V total 2.1 A ports



Individually control socket



Certificate: ETL/ FCC

Max Current: 15 A (Max)

Working Temperature: Room temperature

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V AC, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: Plastic

Operation Humidity: /

Product Dimensions: /

Sales Area: North America

[Back to Table of Contents →](#)

American Smart Socket

[Register and inquire to learn more →](#)



The mobile phone is always on standby and can be charged quickly



Voice control, do what you want



Diverse functions, extraordinary experience



Support software and hardware customization



Certificate: RoHS/ FCC

Max Current: 10 A

Working Temperature: -20°C to 50°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: No

Voltage: 120 V

Operation Environment: Outdoor/ Indoor

Mounting Support: No

Max Wattage: 1200 W

Material: Flame Retardant PC

Operation Humidity: RH 30%–85%

Product Dimensions: 49 x 49 mm

Sales Area: Global

[Back to Table of Contents →](#)

British Smart Socket

[Register and inquire to learn more →](#)



The mobile phone is always on standby and can be charged quickly



Voice control, do what you want



Diverse functions, extraordinary experience



Support software and hardware customization



Certificate: RoHS/ CE

Max Current: 10 A

Working Temperature: -20°C to 50°C

Standards: NO

Protocol: Wi-Fi

IP Degree of Protection: No

Voltage: 100–240 V

Operation Environment: Outdoor/ Indoor

Mounting Support: No

Max Wattage: 1000–2400 W

Material: Flame Retardant PC

Operation Humidity: RH 30%–85%

Product Dimensions: 55 x 55 mm

Sales Area: Global

[Back to Table of Contents →](#)

American Smart Socket

[Register and inquire to learn more →](#)



The mobile phone is always on standby and can be charged quickly



Voice control, do what you want



Diverse functions, extraordinary experience



Support software and hardware customization



Certificate: RoHS/ FCC

Max Current: 10 A

Working Temperature: -20°C to 50°C

Standards: NO

Protocol: Wi-Fi

IP Degree of Protection: No

Voltage: 120 V

Operation Environment: Outdoor/ Indoor

Mounting Support: No

Max Wattage: 2500 W

Material: Flame Retardant PC

Operation Humidity: RH 30%–85%

Product Dimensions: 55 x 55 mm

Sales Area: Global

[Back to Table of Contents →](#)

Medium Size Smart Socket

[Register and inquire to learn more →](#)



The mobile phone is always on standby and can be charged quickly



Voice control, do what you want



Diverse functions, extraordinary experience



Support software and hardware customization



Certificate: RoHS/ CCC

Max Current: 10 A

Working Temperature: -20°C to 50°C

Standards: NO

Protocol: Wi-Fi

IP Degree of Protection: No

Voltage: 220 V

Operation Environment: Outdoor/ Indoor

Mounting Support: No

Max Wattage: 2200 W

Material: Flame Retardant PC

Operation Humidity: RH 30%–85%

Product Dimensions: 47 x 47 mm

Sales Area: Global

[Back to Table of Contents →](#)

European Smart Socket

[Register and inquire to learn more →](#)



The mobile phone is always on standby and can be charged quickly



Voice control, do what you want



Diverse functions, extraordinary experience



Support software and hardware customization



Certificate: RoHS/ CE

Max Current: 10/ 16 A

Working Temperature: -20°C to 50°C

Standards: NO

Protocol: Wi-Fi

IP Degree of Protection: No

Voltage: 220 V

Operation Environment: Outdoor/ Indoor

Mounting Support: No

Max Wattage: 2200–3500 W

Material: Class V0 Fire Protection PC

Operation Humidity: RH 30%–85%

Product Dimensions: 50 x 50 mm

Sales Area: Global

[Back to Table of Contents →](#)

BR Wi-Fi Plug (10 A)

[Register and inquire to learn more →](#)




Remote control, power on or off any device from wherever you are



Monitor electricity consumption, track energy usage, and set schedule to effectively manage power



Voice control, 100% hands-free, turn devices on or off with the power of your voice, compliant with Google home and Amazon Alexa



Set schedules, preset times to make each device run according to your daily habits



Certificate: /

Max Current: 10 A (Max)

Working Temperature: -10°C to 40°C

Standards: Brazil Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 240 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 2400 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%


Product Dimensions: 62.3 x 42.3 x 68 mm

Sales Area: Brazil

[Back to Table of Contents →](#)

EU Wi-Fi Plug (16 A) with USB Ports and Support Power Meter

[Register and inquire to learn more →](#)



Integrated child safety lock




Remote control, power on or off any device from wherever you are



Voice control, 100% hands-free, turn devices on or off with the power of your voice, compliant with Google home and Amazon Alexa



Monitor electricity consumption Track energy usage and set schedule to effectively manage power



Set schedules, Preset times to make each device run according to your daily habits



Dual USB ports, 2.4 A output in total, are compliant with mobile phone and tablet



Certificate: /	Max Current: 16 A (Max)	Working Temperature: -10°C to 40°C
Standards: EU Standard	Protocol: Wi-Fi	IP Degree of Protection: /
Voltage: 240 V, 50 Hz	Operation Environment: Indoor	Mounting Support: Plug In
Max Wattage: 3840 W	Material: PC + ABS Fireproof	Operation Humidity: RH ≤ 85%
Product Dimensions: 103 x 56 x 75.5 mm	Sales Area: Europe country (except France/ Belgium/ Italy/ Switzerland/ UK)	

[Back to Table of Contents →](#)

U.S Type Smart Power Strip With USB Ports

[Register and inquire to learn more →](#)




Remote control,
power on or off any device
from wherever you are



Voice control, 100% hands-free,
turn devices on or off with the power of your voice,
compliant with Google home and Amazon Alexa



Set schedules, preset times
to make each device run
according to your daily habits



Dual USB ports, 2.4 A output in total, are
compliant with mobile phone and tablet



Certificate: /

Max Current: 15 A (Max)

Working Temperature: -10°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 250 x 74 x 33 mm

Sales Area: US/ Canada

[Back to Table of Contents →](#)

U.S Type Smart Wi-Fi Plug

[Register and inquire to learn more →](#)



Remote control,
power on or off any device
from wherever you are



Voice control, 100% hands-free,
turn devices on or off with the power of your voice,
compliant with Google home and Amazon Alexa



Set schedules, preset times
to make each device run
according to your daily habits



Certificate: ETL/ FCC/ CP 65/ DOE

Max Current: 15 A (Max)

Working Temperature: -10°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 64 x 35.5 x 51.5 mm

Sales Area: US/ Canada

[Back to Table of Contents →](#)

U.S Type Smart Wi-Fi Plug with USB Ports

[Register and inquire to learn more →](#)




Remote control,
power on or off any device
from wherever you are



Voice control, 100% hands-free,
turn devices on or off with the power of your voice,
compliant with Google home and Amazon Alexa



Set schedules, preset times
to make each device run
according to your daily habits



Dual USB ports, 2.4 A output in total, are
compliant with mobile phone and tablet



Certificate: ETL/ FCC/ CP 65/ DOE

Max Current: 15 A (Max)

Working Temperature: -10°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 125 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 1875 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 90.5 x 35.5 x 51.5 mm

Sales Area: US/ Canada

[Back to Table of Contents →](#)

AU Type Smart Power Strip with USB Ports


[Register and inquire to learn more →](#)




Remote control,
power on or off any device
from wherever you are



Voice control, 100% hands-free,
turn devices on or off with the power of your voice,
compliant with Google home and Amazon Alexa



Set schedules, preset times
to make each device run
according to your daily habits



Dual USB ports, 2.4 A output in total, are
compliant with mobile phone and tablet



Certificate: SAA/ EMC

Max Current: 10 A (Max)

Working Temperature: -10°C to 40°C

Standards: AU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 240 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 2400 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 275 x 74 x 30 mm

Sales Area: Australia/ New Zealand

[Back to Table of Contents →](#)

AU Type Smart Wi-Fi Plug


[Register and inquire to learn more →](#)



Remote control,
power on or off any device
from wherever you are



Voice control, 100% hands-free,
turn devices on or off with the power of your voice,
compliant with Google home and Amazon Alexa



Set schedules, preset times
to make each device run
according to your daily habits



Monitor electricity consumption, track energy
usage and set schedule to effectively manage power



Certificate: SAA/ EMC

Max Current: 10 A (Max)

Working Temperature: -10°C to 40°C

Standards: AU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 240 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 2400 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 76.5 x 44 x 57.66 mm

Sales Area: Australia/ New Zealand

[Back to Table of Contents →](#)

AU Type Smart Wi-Fi Plug with USB Port


[Register and inquire to learn more →](#)



Remote control, power on or off any device from wherever you are




Voice control, 100% hands-free, turn devices on or off with the power of your voice, compliant with Google home and Amazon Alexa



Set schedules, Preset times to make each device run according to your daily habits



Monitor electricity consumption, track energy usage and set schedule to effectively manage power



Dual USB ports, 2.4 A output in total, are compliant with mobile phone and tablet



Certificate: SAA/ EMC

Max Current: 10 A (Max)

Working Temperature: -10°C to 40°C

Standards: AU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 240 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 2400 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 100.5 x 44 x 57.6 mm

Sales Area: Australia/ New Zealand

[Back to Table of Contents →](#)

AU Type Smart Wi-Fi Plug with USB Port


[Register and inquire to learn more →](#)



Remote control, power on or off any device from wherever you are




Voice control, 100% hands-free, turn devices on or off with the power of your voice, compliant with Google home and Amazon Alexa



Set schedules, Preset times to make each device run according to your daily habits



Monitor electricity consumption, track energy usage and set schedule to effectively manage power



Dual USB ports, 2.4 A output in total, are compliant with mobile phone and tablet



Certificate: SAA/ EMC

Max Current: 10 A (Max)

Working Temperature: -10°C to 40°C

Standards: AU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 240 V, 50/ 60 Hz

Operation Environment: Indoor

Mounting Support: Plug In

Max Wattage: 2400 W

Material: PC + ABS Fireproof

Operation Humidity: RH ≤ 85%

Product Dimensions: 145.5 x 44 x 57.6 mm

Sales Area: Australia/ New Zealand

[Back to Table of Contents →](#)

Wi-Fi Smart Socket SK517-W

[Register and inquire to learn more →](#)



Controlled by mobile phone



Built-in timer



Work with Echo Alexa and Google Assistant



Certificate: ETL/ FCC/ IC

Max Current: 15 A (Max)

Working Temperature: /

Standards: US Standard

Protocol: Wi-Fi + BLE

IP Degree of Protection: /

Voltage: 125 V AC, 60 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: /

Material: PC + ABS + Copper

Operation Humidity: /

Product Dimensions: 51 x 50 x 51 mm

Sales Area: US/ CA

[Back to Table of Contents →](#)

Wi-Fi Smart Plug with Energy Monitoring SK513-WP

[Register and inquire to learn more →](#)



Single output Wi-Fi smart socket



With energy monitoring



With remote control function, countdown function, and timer function



Certificate: ETL/ FCC/ IC

Max Current: 15 A (Max)

Working Temperature: /

Standards: US Standard

Protocol: Wi-Fi + BLE

IP Degree of Protection: /

Voltage: 125 V AC, 60 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: /

Material: PC + ABS + Copper

Operation Humidity: /

Product Dimensions: 88.5 x 39.5 x 49.5 mm

Sales Area: US/ CA


[Back to Table of Contents →](#)

2-Outlet Outdoor Wi-Fi Smart Socket (Independently Controlled) SK509-W-2S

[Register and inquire to learn more →](#)




Controlled by mobile phone



Built-in timer



Work with Echo Alexa
and Google Assistant



Outdoor use only



Certificate: ETL/ FCC/ IC

Max Current: 15 A (Max)

Working Temperature: /

Standards: US Standard

Protocol: Wi-Fi + BLE

IP Degree of Protection: /

Voltage: 125 V AC, 60 Hz

Operation Environment: Outdoor

Mounting Support: /

Max Wattage: /

Material: PC + ABS + Copper

Operation Humidity: /

Product Dimensions: 98 x 69.5 x 38.5 mm

Sales Area: US/ CA

[Back to Table of Contents →](#)

Wi-Fi Smart Socket 16 A

[Register and inquire to learn more →](#)



Controlled by mobile phone



Built-in timer



Work with Echo Alexa
and Google Assistant



Certificate: CE/ RoHS

Max Current: 16 A (Max)

Working Temperature: /

Standards: EU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 230 V AC, 50 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: /

Material: PC + ABS + Copper

Operation Humidity: /

Product Dimensions: 56 x 56 x 60 mm

Sales Area: Europe


[Back to Table of Contents →](#)

Wi-Fi Smart Socket 16 A

[Register and inquire to learn more →](#)



Controlled by mobile phone



Built-in timer



Work with Echo Alexa
and Google Assistant



Certificate: CE/ RoHS

Max Current: 16 A (Max)

Working Temperature: /

Standards: EU Standard

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 230 V AC, 50 Hz

Operation Environment: Indoor

Mounting Support: /

Max Wattage: /

Material: PC + ABS + Copper

Operation Humidity: /


Product Dimensions: 56 x 56 x 57 mm

Sales Area: Europe

[Back to Table of Contents →](#)


Mini Smart Plug

[Register and inquire to learn more →](#)



Remote and Voice Control

Control the socket from anywhere anytime. Works with Amazon Alexa, Google Assistant, simply use your voice command to control your home devices



Schedule and Timer

You can schedule the socket to turn on and off automatically. Added benefit of saving energy when the plugged-in appliances are not needed or are left on by accident




Control from Anywhere

Control all your devices using your smartphone from anywhere, at any time. All you need is your home 2.4 GHz Wi-Fi network (must be a unique SSID specific to the 2.4 GHz network) and the free Smart Life app (on iOS or Android). No special bridges, gateways, or hubs required



Outdoor & Indoor Use

IP65 weatherproof housing. Ideal for Garden, Backyard, Kitchen, Bathroom, Porch, Balcony, Garage, Basement, Patio or Electric grill, Sprinkler, Washing machine, Christmas tree, landscape lighting, fountains, lamps, pumps, and other outdoor or indoor-use electric appliances, etc. IMPORTANT! This unit is suitable for outdoor use in damp locations. Do not expose to rain or immerse in water



Fast & Easy Setup

Plug in the smart outdoor outlets, simply download Smart Life app, connect to your Wi-Fi network, then you can control your devices via your phone



Certificate: ETL/ FCC	Max Current: /	Working Temperature: 0°C to 40°C
Standards: US Standard	Protocol: Wi-Fi	IP Degree of Protection: IP65
Voltage: 100–240 V AC, 50/ 60 Hz	Operation Environment: Indoor/ Outdoor	Mounting Support: DIY
Max Wattage: 1800 W	Material: PC	Operation Humidity: /
Product Dimensions: 3.16 x 2.2 x 1.53 inch	Sales Area: North America	

[Back to Table of Contents →](#)


Mini Smart Dimmer Plug

[Register and inquire to learn more →](#)



Remote and Voice Control

Control the socket from anywhere anytime. Works with Amazon Alexa, Google Assistant, simply use your voice command to control your home devices



Schedule and Timer

You can schedule the socket to turn on and off automatically. Added benefit of saving energy when the plugged-in appliances are not needed or are left on by accident




Control from Anywhere

Control all your devices using your smartphone from anywhere, at any time. All you need is your home 2.4 GHz Wi-Fi network (must be a unique SSID specific to the 2.4 GHz network) and the free Smart Life app (on iOS or Android). No special bridges, gateways, or hubs required



Outdoor & Indoor Use

IP65 weatherproof housing. Ideal for Garden, Backyard, Kitchen, Bathroom, Porch, Balcony, Garage, Basement, Patio or Electric grill, Sprinkler, Washing machine, Christmas tree, landscape lighting, fountains, lamps, pumps, and other outdoor or indoor-use electric appliances, etc. **IMPORTANT!** This unit is suitable for outdoor use in damp locations. Do not expose to rain or immerse in water



Fast & Easy Setup

Plug in the smart outdoor outlets, simply download Smart Life app, connect to your Wi-Fi network, then you can control your devices via your phone



Certificate: ETL/ FCC

Max Current: /

Working Temperature: 0°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP65

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor/ Outdoor

Mounting Support: DIY

Max Wattage: 500 W

Material: PC

Operation Humidity: /

Product Dimensions: 3.16 x 2.2 x 1.53 inch

Sales Area: North America

[Back to Table of Contents →](#)

Outdoor Smart Plug – 1 CH

[Register and inquire to learn more →](#)




IP65 waterproof, ideal for seasonal and landscape lighting, fountains and pumps



Alexa Compatible
Work with Alexa for voice control



Features one smart outlet and one "always-on" outlet, with two integrated weather-resistant outlet covers that protects module from dirt and debris when not in use



Certifications
ETL listed and FCC listed



Remote Control
Wirelessly schedule and control your home's outdoor lighting and appliances, works with LED, CFL, halogen and incandescent bulbs and other devices. Supported voltage 120 VAC, total load is max 15 A mp



Certificate: ETL/ FCC

Max Current: /

Working Temperature: 0°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP65

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor/ Outdoor

Mounting Support: DIY

Max Wattage: 1800 W

Material: PC

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: North America

[Back to Table of Contents →](#)

Outdoor Smart Plug – 2 CH

[Register and inquire to learn more →](#)




IP65 waterproof, ideal for seasonal and landscape lighting, fountains and pumps



Alexa Compatible
Work with Alexa for voice control



Features one smart outlet and one "always-on" outlet, with two integrated weather-resistant outlet covers that protects module from dirt and debris when not in use



Certifications
ETL listed and FCC listed



Remote Control
Wirelessly schedule and control your home's outdoor lighting and appliances, works with LED, CFL, halogen and incandescent bulbs and other devices. Supported voltage 120 VAC, total load is max 15 A mp



Certificate: ETL/ FCC

Max Current: /

Working Temperature: 0°C to 40°C

Standards: US Standard

Protocol: Wi-Fi

IP Degree of Protection: IP65

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor/ Outdoor

Mounting Support: DIY

Max Wattage: 1800 W

Material: PC

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: North America

[Back to Table of Contents →](#)

US Smart Plug

[Register and inquire to learn more →](#)




Remote access and control



No hub required



Voice command compatible with Alexa and Google Assistant




Set schedules that is convenient for the family



Scene setting as a camouflage for security purposes



Enjoy more features with IFTTT




Multiple timers that you can set on schedule



Rated current: 10 A (Max)



Rated voltage: 100–240 V AC (50/ 60 Hz)



Rated power: 1200 W



Certificate: UL/ ETL/ FCC

Max Current: /

Working Temperature: /

Standards: US/ Canada

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Smart Plug


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT




Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule



Rated voltage:
100–240 V AC (50/ 60 Hz)



Voice command compatible
with Alexa and Google Assistant




Rated current: 15 A (Max)



2 x USB output: 5 V, 2.1 A (Max)



Scene setting as a camouflage
for security purposes



Set schedules that is convenient for the family



Certificate: ETL/ FCC

Max Current: /

Working Temperature: /

Standards: US/ Canada

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Smart Wall Tap Plug 4 x 4 (US)


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT




Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule




Rated voltage:
100–240 V AC (50/ 60 Hz)



Voice command compatible
with Alexa and Google Assistant




Rated current: 15 A (Max)




4 x USB output: 5 V, 2.1 A (Max)



Scene setting as a camouflage
for security purposes



Set schedules that is convenient for the family

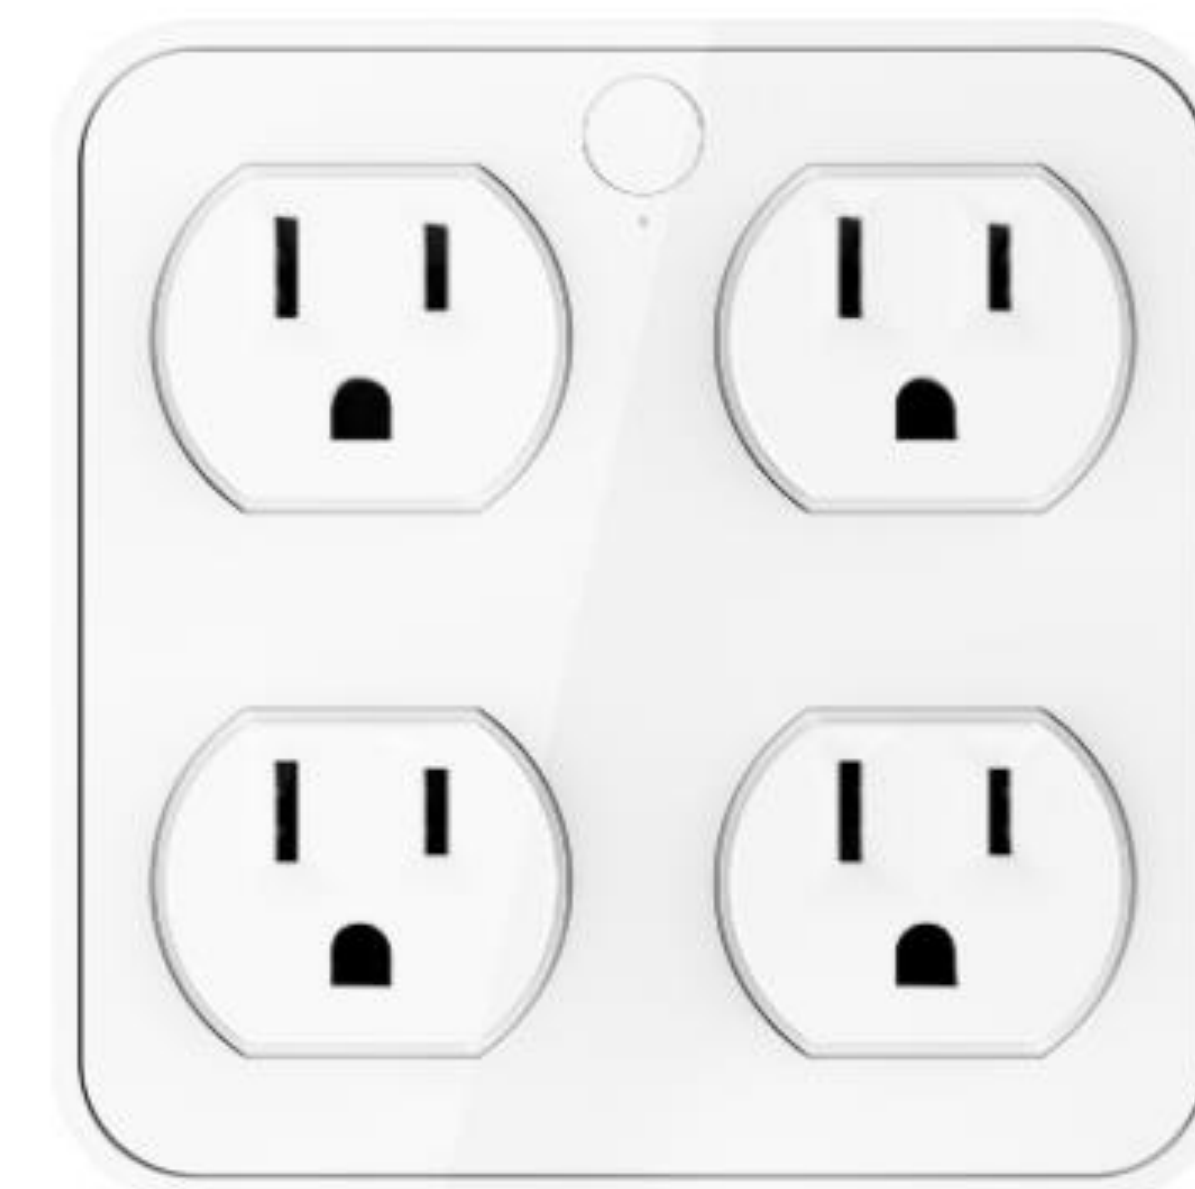

Certificate: ETL/ FCC

Max Current: /

Working Temperature: /

Standards: US/ Canada

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Power Strip 4 x 4 (US)


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT




Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule



Rated voltage:
100–240 V AC (50/ 60 Hz)




Voice command compatible
with Alexa and Google Assistant



Rated current: 15 A (Max)



Scene setting as a camouflage
for security purposes




Set schedules that is convenient for the family



4 x USB output: 5 V, 2.1 A (Max)



Cable length: 1.8 m

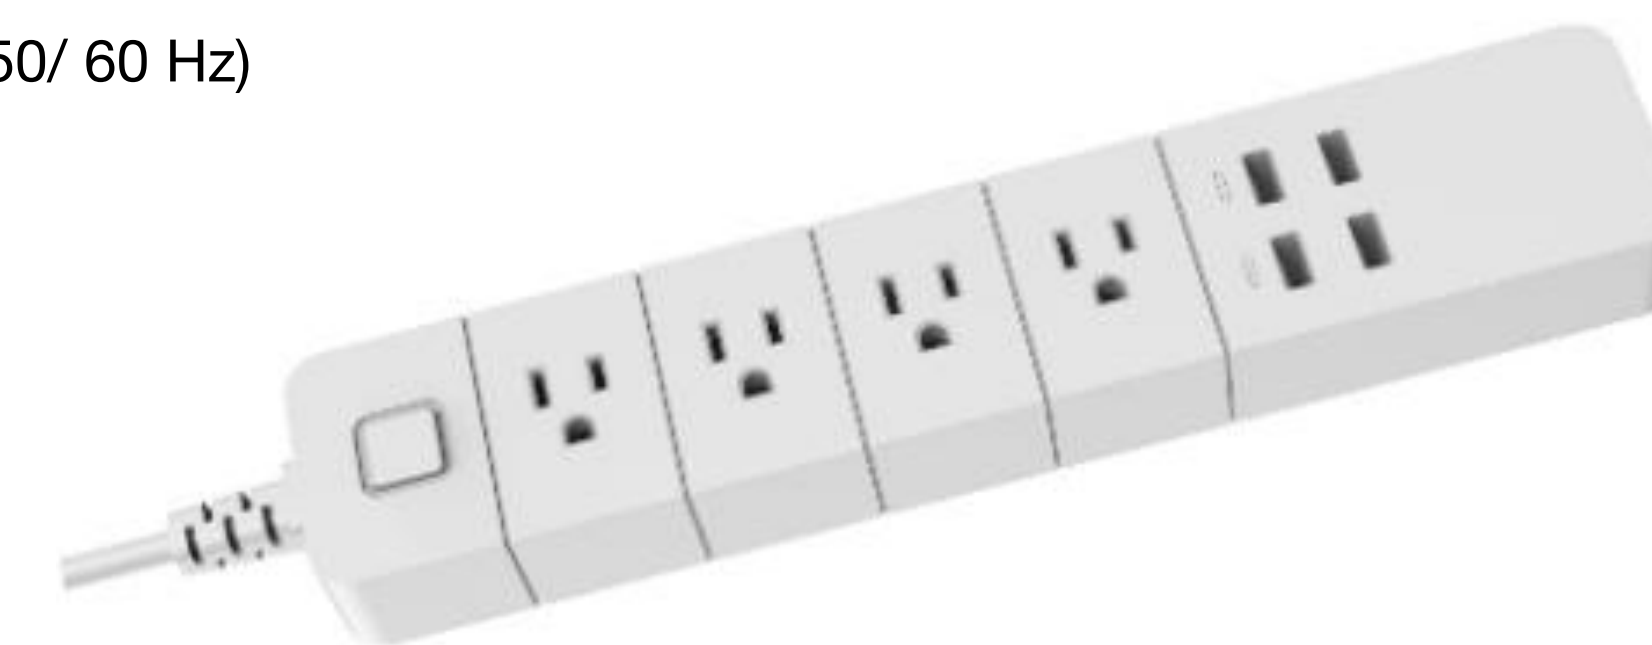

Certificate: ETL/ FCC

Max Current: /

Working Temperature: /

Standards: US/ Canada

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Dual Plug 2 x 2 (Chile)


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT




Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule



Rated voltage:
100–240 V AC (50/ 60 Hz)



Voice command compatible
with Alexa and Google Assistant




Rated current: 15 A (Max)



2 x USB output: 5 V, 2.1 A (Max)



Scene setting as a camouflage
for security purposes



Set schedules that is convenient for the family



Certificate: /

Max Current: /

Working Temperature: /

Standards: US/ Canada

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /

Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Wall Tap Plug 4 x 4 (Chile/ Italy)


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT




Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule



Rated voltage:
100–240 V AC (50/ 60 Hz)



Voice command compatible
with Alexa and Google Assistant




Rated current: 15 A (Max)




4 x USB output: 5 V, 2.1 A (Max)



Scene setting as a camouflage
for security purposes



Set schedules that is convenient for the family

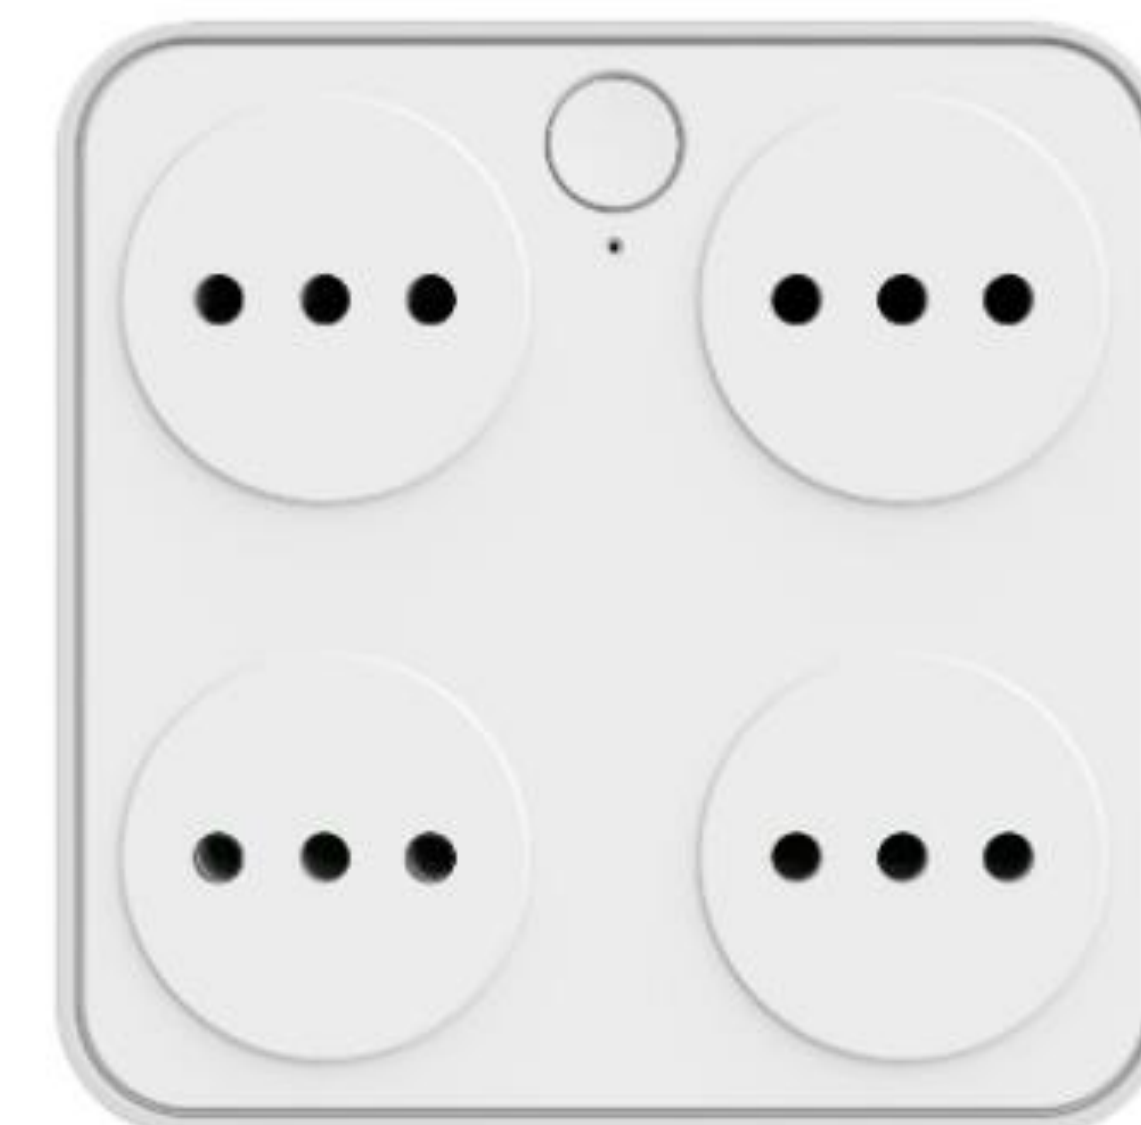

Certificate: /

Max Current: /

Working Temperature: /

Standards: Chile/ Italy

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /


Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Power Strip 4 x 4 (Chile)


[Register and inquire to learn more →](#)



Remote access and control




Enjoy more features with IFTTT



Rated power: 1875 W



No hub required



Multiple timers that you can set on schedule



Rated voltage:
100–240 V AC (50/ 60 Hz)



Voice command compatible
with Alexa and Google Assistant




Rated current: 15 A (Max)




4 x USB output: 5 V, 2.1 A (Max)



Scene setting as a camouflage
for security purposes



Set schedules that is convenient for the family



Cable length: 1.8 m



Certificate: /

Max Current: /

Working Temperature: /

Standards: Chile/ Italy

Protocol: Wi-Fi

IP Degree of Protection: /

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: /

Mounting Support: /

Max Wattage: /

Material: /

Operation Humidity: /


Product Dimensions: 4.92 x 3.42 x 1.77 inch

Sales Area: /

[Back to Table of Contents →](#)

Bluetooth Tracker

[Register and inquire to learn more →](#)




Simple and thinness appearance design, round and cobblestone feel, smooth skin-friendly touch




Find Your Phone
Can't find your phone? Simply double press the button on your device to make your phone ring, even when it's on silent.



Ring Your Things
Use your smartphone to make your device ring when you misplace your things within 200 feet Bluetooth range.



Battery Life
Replaceable CR2032 battery is guaranteed for one year from activation. You can easily replace it yourself.

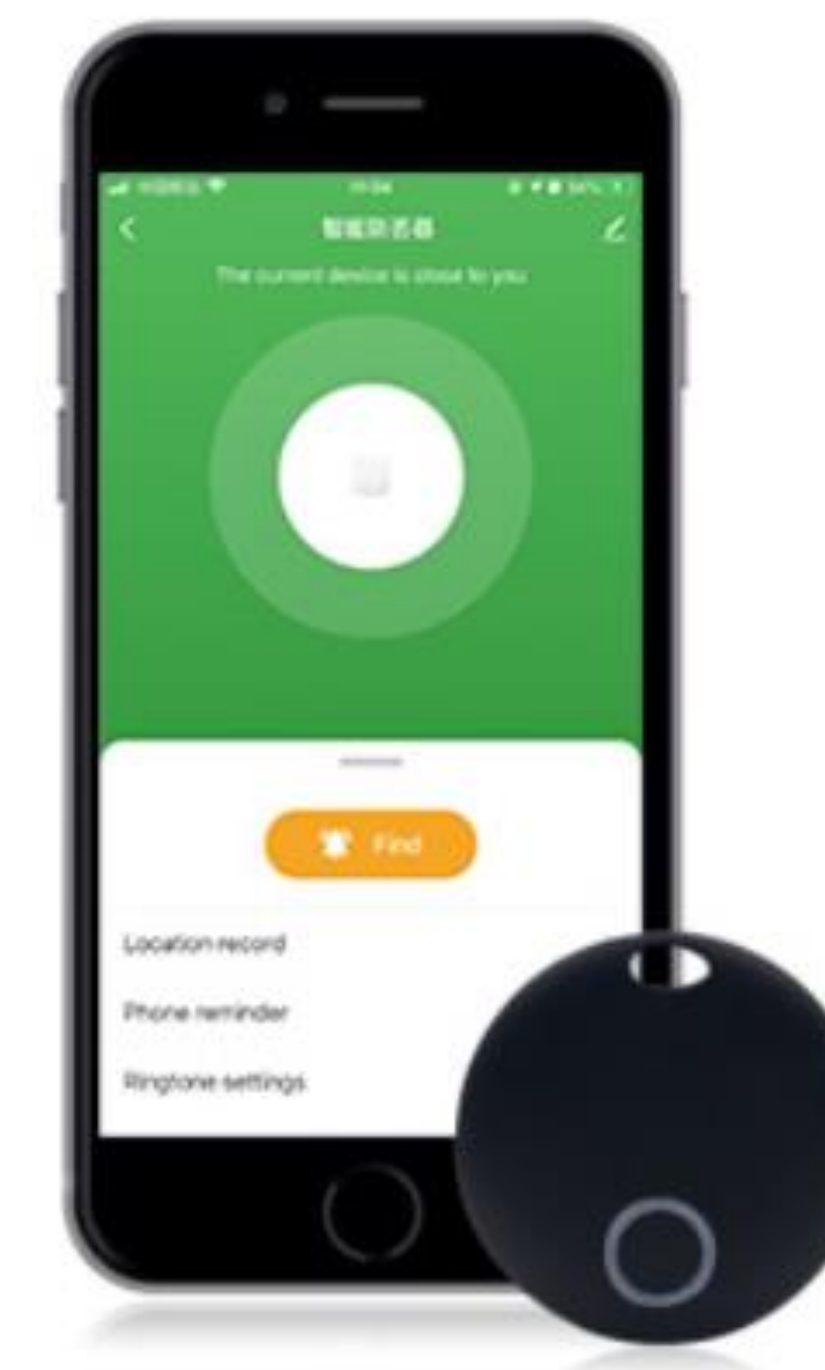

Certificate: CE/ FCC/ RoHS/ Telec

Max Current: /

Working Temperature: /

Standards: /

Protocol: /

IP Degree of Protection: IP67

Voltage: 3 V

Operation Environment: Outdoor/ Indoor

Mounting Support: /

Max Wattage: /

Material: Plastic

Operation Humidity: /

Product Dimensions: 37 x 37 x 8.5 mm

Sales Area: Global

[Back to Table of Contents →](#)

F6 BLE Smart Finder

[Register and inquire to learn more →](#)



One key to find



Find your phone



Disconnection alarm



Connection memory



Certificate: CE/ FCC

Max Current: 10.5 mA (Max)

Working Temperature: -20°C to 60°C

Standards: Regular standard

Protocol: Bluetooth

IP Degree of Protection: IP65

Voltage: 3 V DC

Operation Environment: Outdoor/ Indoor

Mounting Support: /

Max Wattage: /

Material: Plastic

Operation Humidity: /

Product Dimensions: 45 x 45 x 6.5 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Finder


[Register and inquire to learn more →](#)



Find your phone



Anti-loss of important items



Replaceable battery



One touch find



Certificate: CE/ FCC/ BQB

Max Current: /

Working Temperature: 0°C to 60°C (32°F to 104°F)

Standards: /

Protocol: Bluetooth/ iBeacon

IP Degree of Protection: /

Voltage: 3 V

Operation Environment: Outdoor/ Indoor

Mounting Support: /

Max Wattage: /

Material: ABS

Operation Humidity: RH 0%–90%


Product Dimensions: 37 x 41 x 8 mm

Sales Area: Global

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)



Affordable 3- Way Solution

Work with regular 3 way switches,
no special companion switch needed




Remote app and manual control, ON/
OFF, set schedules, and run timers



Voice Control

Work with Amazon Alexa and Google
Assistant (sold separately) to enable voice control



ETL and FCC listed




Certificate: ETL/ FCC	Button Quantity: 1 Gang	Sales Area: North America
Standards: US Standard	Protocol: Wi-Fi	Working Temperature: 0°C to 40°C
Voltage: 100–240 V AC, 50/ 60 Hz	Operation Environment: Indoor	IP Degree of Protection: /
Max Wattage: 1800 W	Material: PC	Mounting Support: Wiring
Switch Function: 2000 W (Max)	Product Dimensions: 4.1 x 16.5 x 1.8 inch	Distance: Up to 100 Feet Line of Sight
Wiring Configuration: Neutral Required	Max Current: 15 A	Product Color: White
Button Type: Rocker		

[Back to Table of Contents →](#)

Smart On/ Off Toggle Switch

[Register and inquire to learn more →](#)



Affordable 3- Way Solution

Work with regular 3 way switches, no special companion switch needed




Voice Control

Work with Amazon Alexa and Google Assistant (sold separately) to enable voice control



Remote Operation

Control the device remotely with your smartphone when connected to a 2.4G Wi-Fi network or enjoy manual ON/ OFF operation from the switch. Home automation is simple through setting schedules and running timers.



ETL and FCC listed



Certificate: ETL/ FCC

Button Quantity: 1 Gang

Sales Area: North America

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 1800 W

Material: PC

Mounting Support: Wiring

Switch Function: Single Pole/ 3-Way

Product Dimensions: 4.1 x 16.5 x 1.8 inch

Distance: Up to 100 Feet Line of Sight

Wiring Configuration: Neutral Required

Max Current: 15 A


Product Color: White

Button Type: Toggle

[Back to Table of Contents →](#)

Smart 1 Gang 16 A x Touch Switch Module

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, Damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (APP Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Quantity: 1 Gang

Sales Area: South Asia

Standards: IN Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 3600 W

Material: Glass

Mounting Support: Wiring

Switch Function: 1 Gang

Product Dimensions: 45 x 45 mm

Distance: Up to 100 Feet Line of Sight

Wiring Configuration: Neutral Required

Max Current: 16 A


Product Color: White/ Black

Button Type: Touch

[Back to Table of Contents →](#)

Smart 1 Gang 32 A x Touch Switch Module

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, Damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (APP Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking




Certificate: RoHS	Button Quantity: 1 Gang	Sales Area: South Asia
Standards: IN Standard	Protocol: Wi-Fi	Working Temperature: 0°C to 40°C
Voltage: 100–240 V AC, 50/ 60 Hz	Operation Environment: Indoor	IP Degree of Protection: /
Max Wattage: 7000 W	Material: Glass	Mounting Support: Wiring
Switch Function: 1 Gang	Product Dimensions: 45 x 45 mm	Distance: Up to 100 Feet Line of Sight
Wiring Configuration: Neutral Required	Max Current: 32 A	Product Color: White/ Black
Button Type: Touch		

[Back to Table of Contents →](#)

Smart 2 Gang Touch Switch Module

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, Damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (APP Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Quantity: 2 Gangs

Sales Area: South Asia

Standards: IN Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 3600 W

Material: Glass

Mounting Support: Wiring

Switch Function: 2 Gangs

Product Dimensions: 45 x 45 mm

Distance: Up to 100 Feet Line of Sight

Wiring Configuration: Neutral Required

Max Current: 16 A x 2


Product Color: White/ Black

Button Type: Touch

[Back to Table of Contents →](#)

Smart 4 Gang Touch Switch Module

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, Damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (APP Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required




Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Quantity: 4 Gangs

Sales Area: South Asia

Standards: IN Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Voltage: 100–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 3600 W

Material: Glass

Mounting Support: Wiring

Switch Function: 4 Gangs

Product Dimensions: 45 x 45 mm

Distance: Up to 100 Feet Line of Sight

Wiring Configuration: Neutral Required

Max Current: 10 A x 4

Product Color: White/ Black

Button Type: Touch

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control




Countdown




ON/ OFF physical keys



Timing



Sharing

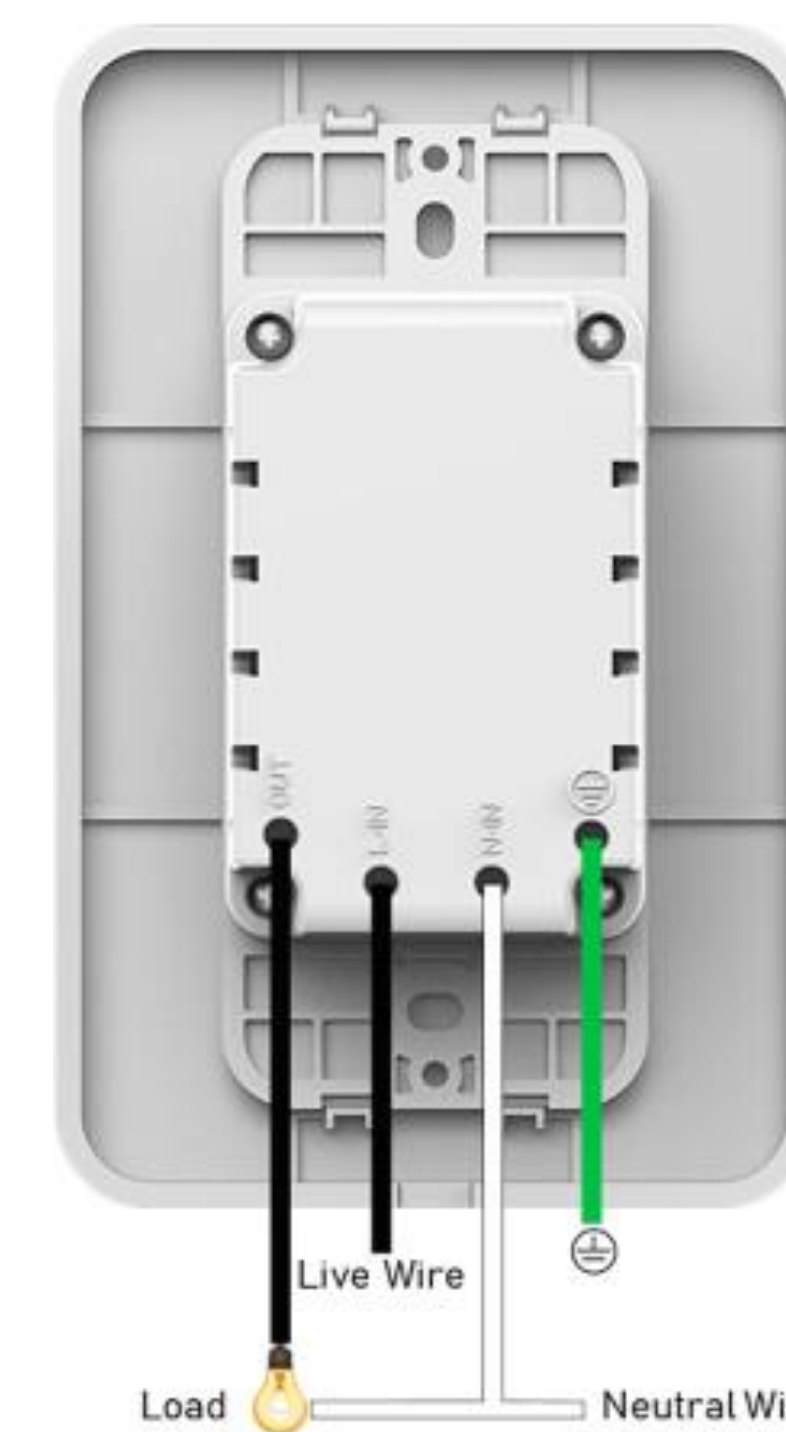

Certificate: CE/ FCC/ ETL

Button Quantity: 1 Gang

Sales Area: North America/ South America/ Southeast Asia

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 110–125 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage: 1650 W

Material: PP Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 125 x 80 x 32 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Button/ Rocker

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing



Countdown



Sharing



Physical keys



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 1 Gang

Sales Area: North America/ South America/ Southeast Asia

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 110–125 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage: 1650 W

Material: PP Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 120 x 70 x 35 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Touch switch



LED noctilucant navigation



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 1 Gang

Sales Area: North America/ South America/ Southeast Asia

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 110-125 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage: 1650 W

Material: Tempered Crystal Glass

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 120 x 70 x 35.5 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Touch

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown




Sharing



Physical button



LED noctilucent navigation

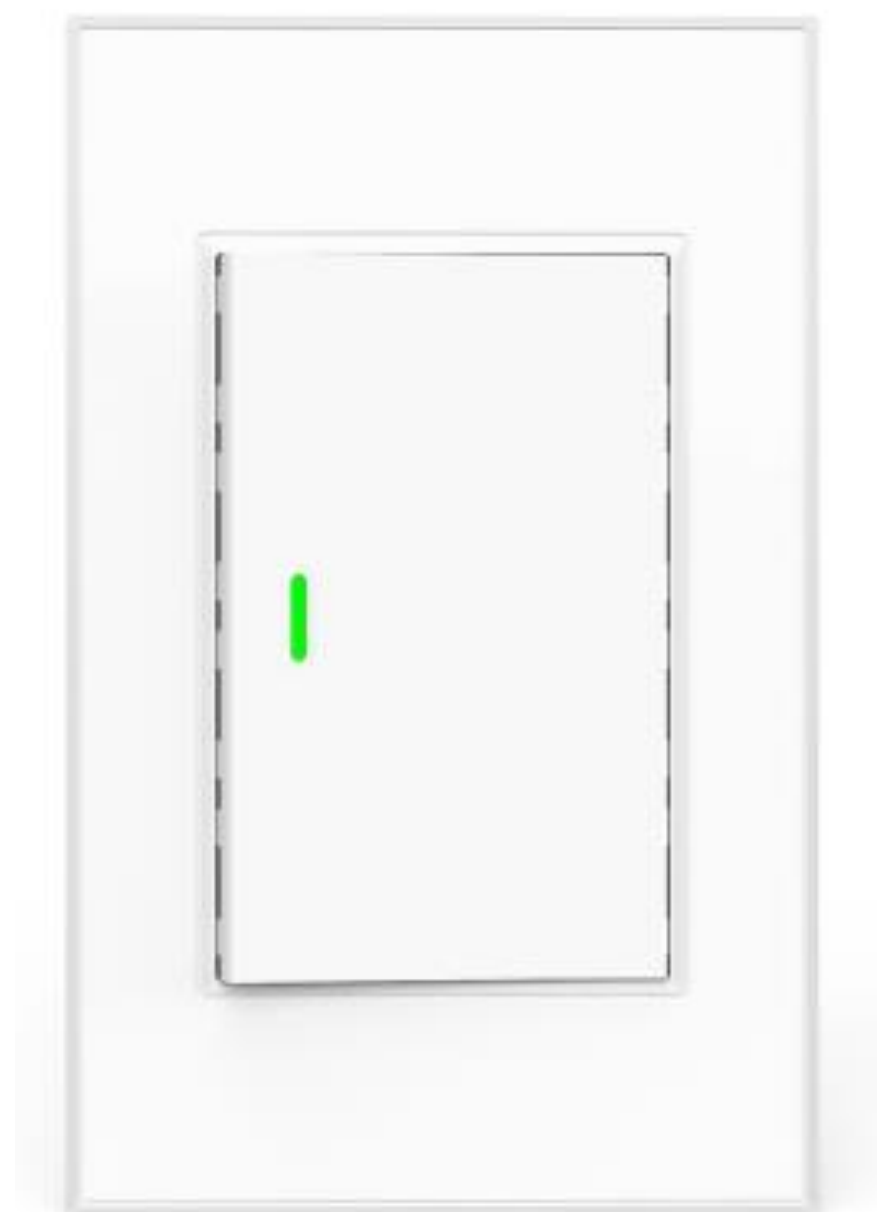

Certificate: CE/ FCC/ ETL CETL

Button Quantity: 1 Gang

Sales Area: Thailand/ Taiwan

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:

INC 600 W (Max)/ Gang

LED 150 W (Max)/ Gang

Material: PC

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 28 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown




Sharing



Physical button



LED noctilucant navigation

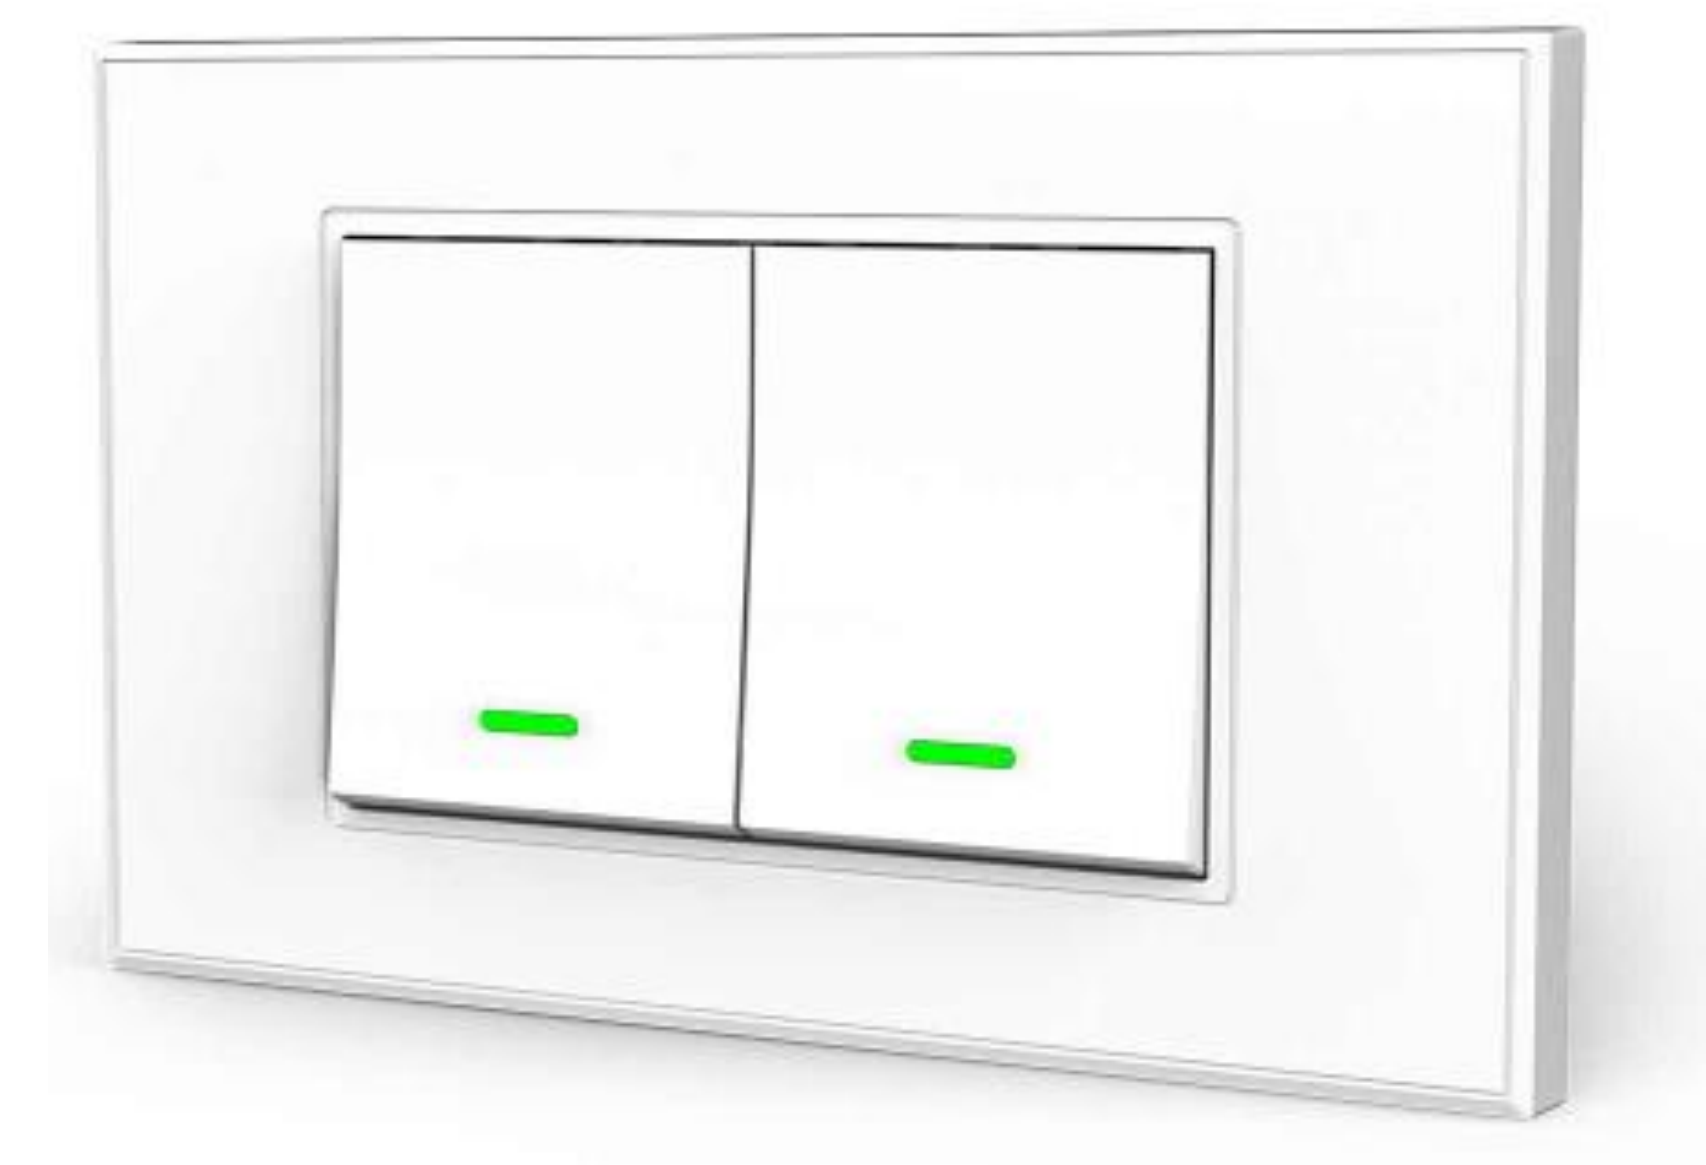

Certificate: CE/ FCC/ ETL CETL

Button Quantity: 2 Gangs

Sales Area: Thailand/ Taiwan

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:

INC 600 W (Max)/ Gang

LED 150 W (Max)/ Gang

Material: PC

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 28 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)



Mobile remote control




Countdown




Physical button



Timing



Sharing



LED noctilucant navigation



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 3 Gangs

Sales Area: Thailand/ Taiwan

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:

INC 600 W (Max)/ Gang

LED 150 W (Max)/ Gang

Material: PC

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 28 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 15 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Physical button



LED noctilucent navigation



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 1 Gang

Sales Area: Most of countries

Standards: US/ AU Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: PC Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 35 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral (Optional) + Live Wire

Max Current: 10 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Physical button



LED noctilucent navigation



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 2 Gangs

Sales Area: Most of countries

Standards: US/ AU Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: PC Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 35 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral (Optional) + Live Wire

Max Current: 10 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Physical button



LED noctilucent navigation



Certificate: CE/ FCC/ ETL CETL

Button Quantity: 3 Gangs

Sales Area: Most of countries

Standards: US/ AU Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: PC Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 116 x 75 x 35 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral (Optional) + Live Wire

Max Current: 10 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Touch button



LED noctilucent navigation



Certificate: CE/ RoHS

Button Quantity: 1 Gang

Sales Area:

Europe/ Mainland/ Middle East/ Indonesia/ Russia

Standards: EUR Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:

INC 600 W (Max)

LED 150 W (Max)

Material: Tempered Crystal Glass

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 32 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 10 A (Max)

Product Color: White and Black

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Touch button



LED noctilucant navigation



Certificate: CE/ RoHS

Button Quantity: 2 Gangs

Sales Area:

Europe/ Mainland/ Middle East/ Indonesia/ Russia

Standards: EUR Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: Tempered Crystal Glass

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 32 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 10 A (Max)

Product Color: White and Black

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing




Countdown



Sharing



Touch button



LED noctilucent navigation



Certificate: CE/ RoHS

Button Quantity: 3 Gangs

Sales Area:

Europe/ Mainland/ Middle East/ Indonesia/ Russia

Standards: EUR Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 100–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: Tempered Crystal Glass

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 32 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 10 A (Max)

Product Color: White and Black

Button Type: Button

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing



Countdown



Sharing



Physical switch



Certificate: CE/ RoHS

Button Quantity: 2 Gangs

Sales Area:

Europe/ Mainland/ Middle East/ Indonesia/ Russia

Standards: EU Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: PP Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 26 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 10 A (Max)

Product Color: White/ Black/ Silver

Button Type: Button

[Back to Table of Contents →](#)

Switch

[Register and inquire to learn more →](#)




Mobile remote control



Timing



Countdown



Sharing



Physical switch



Certificate: CE/ RoHS

Button Quantity: 3 Gangs

Sales Area:

Europe/ Mainland/ Middle East/ Indonesia/ Russia

Standards: EU Standard

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: Level 1

Max Wattage:
INC 600 W (Max)
LED 150 W (Max)

Material: PP Fireproof Material

Mounting Support: Embedded Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 26 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral + Live Wire

Max Current: 10 A (Max)

Product Color: White/ Black/ Silver

Button Type: Button

[Back to Table of Contents →](#)

Smart Wi-Fi EU Lighting Switch

[Register and inquire to learn more →](#)




Smart phone remote control



Waterproof panel



One key on/ off

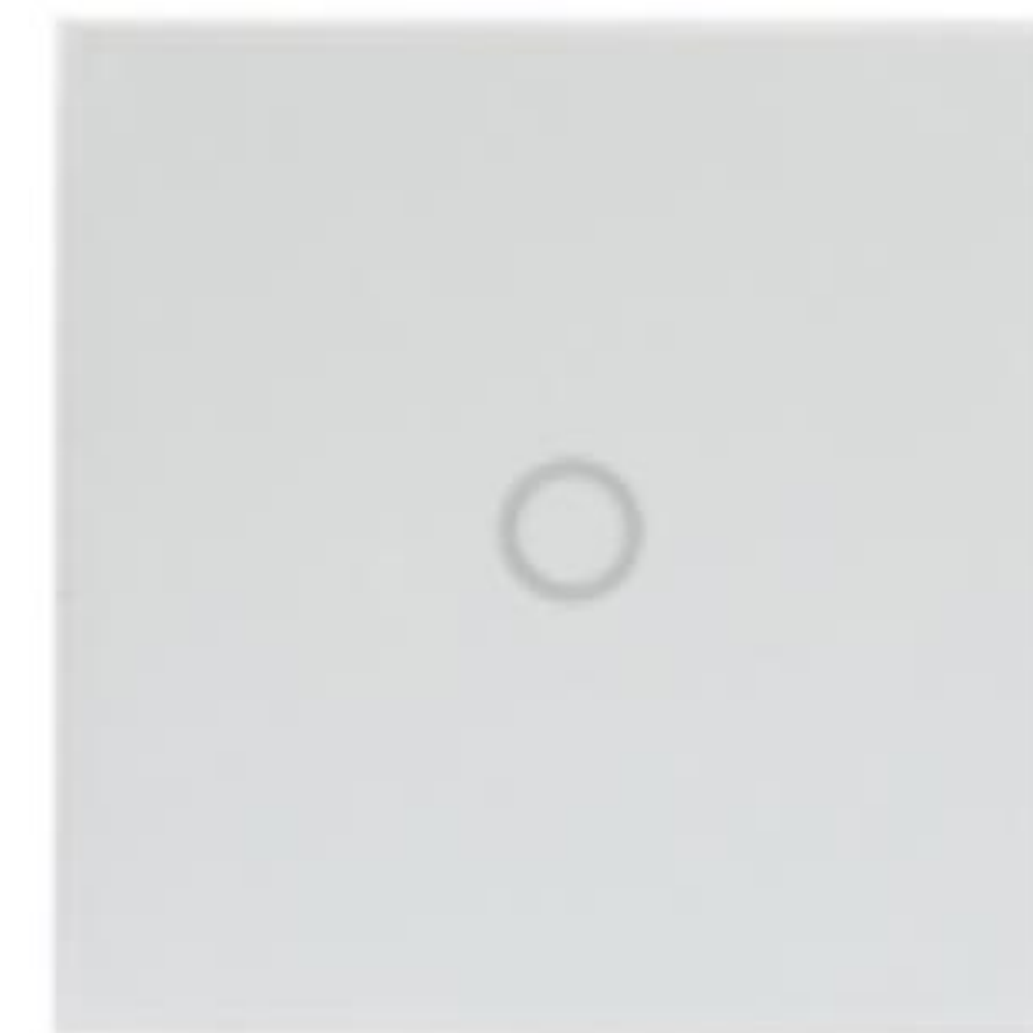

Certificate: CE/ FCC/ RoHS

Button Quantity: 1 Gang

Sales Area: Global

Standards: EU Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 34 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive

[Back to Table of Contents →](#)

Smart Wi-Fi EU Lighting Switch

[Register and inquire to learn more →](#)




Smart phone remote control



Waterproof panel



One key on/ off

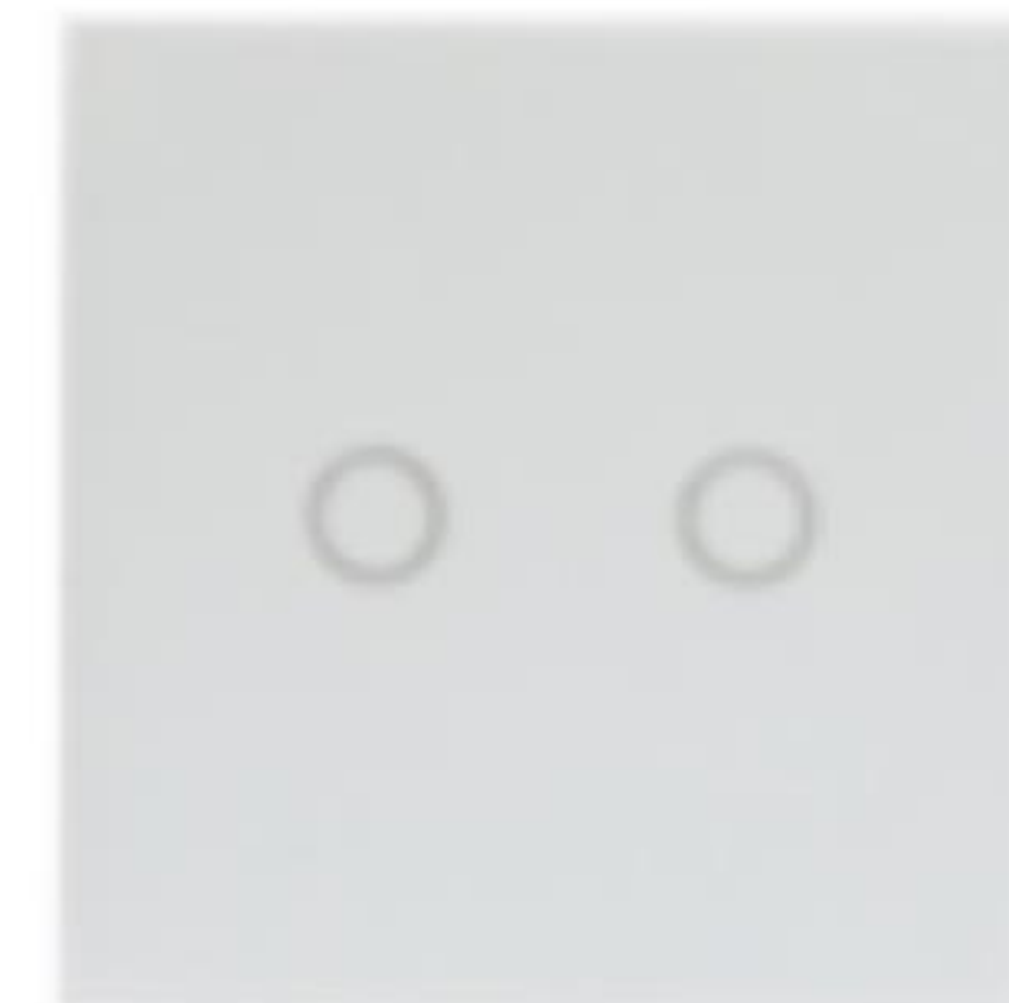

Certificate: CE/ FCC/ RoHS

Button Quantity: 2 Gangs

Sales Area: Global

Standards: EU Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 34 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive


[Back to Table of Contents →](#)

Smart Wi-Fi EU Lighting Switch

[Register and inquire to learn more →](#)




Smart phone remote control



Waterproof panel



One key on/ off

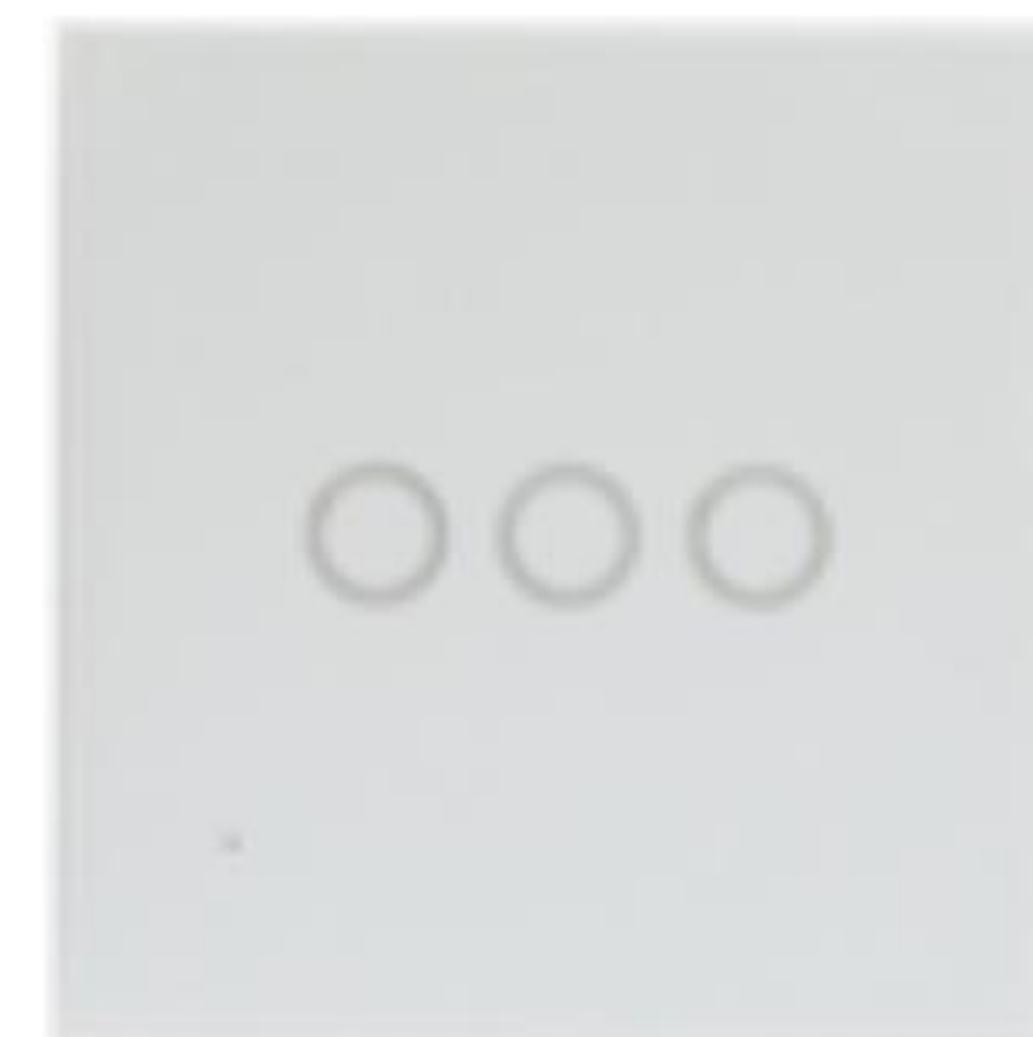

Certificate: CE/ FCC/ RoHS

Button Quantity: 3 Gangs

Sales Area: Global

Standards: EU Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 34 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive

[Back to Table of Contents →](#)

US Standard 1 Gang Touch Sensitive Wi-Fi Smart Wireless Light Switch Smart Home

[Register and inquire to learn more →](#)



Smart phone remote control



Waterproof panel



One key on/ off



Certificate: CE/ FCC/ RoHS

Button Quantity: 1 Gang

Sales Area: Global

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 74 x 37 x 120 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive

[Back to Table of Contents →](#)

US Standard 1 Gang Touch Sensitive Wi-Fi Smart Wireless Light Switch Smart Home

[Register and inquire to learn more →](#)



Smart phone remote control



Waterproof panel



One key on/ off



Certificate: CE/ FCC/ RoHS

Button Quantity: 2 Gang

Sales Area: Global

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 74 x 37 x 120 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive

[Back to Table of Contents →](#)

US Standard 1 Gang Touch Sensitive Wi-Fi Smart Wireless Light Switch Smart Home

[Register and inquire to learn more →](#)



Smart phone remote control



Waterproof panel



One key on/ off



Certificate: CE/ FCC/ RoHS

Button Quantity: 3 Gangs

Sales Area: Global

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Voltage: 85–250 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: /

Material: PC + ABS

Mounting Support: /

Switch Function: Single Pole

Product Dimensions: 74 x 37 x 120 mm

Distance: 45 m

Wiring Configuration: Live Wire + Neutral Wire

Max Current: /

Product Color: White

Button Type: Touch Sensitive


[Back to Table of Contents →](#)

Smart Lighting Switch


[Register and inquire to learn more →](#)




Dim lights from multiple locations



Push arrows once to turn lights on/
off or hold down to increase/
decrease light level




Air-gap switch cuts off power to the switch



Impact-resistant polycarbonate thermoplastic



Dimmable LED: 150 W; incandescent or
halogen: 600 W



UL listed. 121 V AC; neutral wire required



Certificate: UL/ RoHS

Button Quantity: 1 Gang

Sales Area: South America/ Canada

Standards: US Standard

Protocol: Wi-Fi

Working Temperature: /

Voltage: 120 V AC, 60 Hz

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: Frequency: 908.42 MHz

Material: PC Cover + Copper Accessary

Mounting Support: In-Wall Installation

Switch Function: Single Pole/ 3-Way

Product Dimensions: 112 x 51.8 x 47.5 mm

Distance: 30 m

Wiring Configuration: Neutral Required

Max Current: 15 A

Product Color: White/ Iron/ Gray

Button Type: Button/ Rocker

[Back to Table of Contents →](#)

Zigbee 4 Gang Light Switch

[Register and inquire to learn more →](#)



App control



Voice control



2-way control



Power metering function



Certificate: SAA/ CE/ RoHS

Button Quantity: 4 Gangs

Sales Area: Global

Standards: US Standard

Protocol: Zigbee

Working Temperature: /

Voltage: 110–240 V AC

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 1000 W/ Gang

Material: Tempered Glass

Mounting Support: /

Switch Function: 2-Way

Product Dimensions: 120 x 72 x 43 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral Required

Max Current: 10 A

Product Color: White/ Black

Button Type: Touch

[Back to Table of Contents →](#)

Wi-Fi 8 Gang Touch Switch

[Register and inquire to learn more →](#)



App control



Voice control



Power metering function



Certificate: CE/ RoHS

Button Quantity: 8 Gangs

Sales Area: Global

Standards: UK Standard

Protocol: Wi-Fi

Working Temperature: /

Voltage: 110–240 V AC

Operation Environment: Indoor

IP Degree of Protection: /

Max Wattage: 1000 W/ Gang

Material: Tempered Glass

Mounting Support: /

Switch Function: 1-Way

Product Dimensions: 147 x 86 x 37 mm

Distance: No Distance Limitation

Wiring Configuration: Neutral Required

Max Current: 10 A

Product Color: White/ Black

Button Type: Touch

[Back to Table of Contents →](#)

Smart Lighting Switch Zigbee Smart Switch 2 Gang


[Register and inquire to learn more →](#)




Wi-Fi/ Zigbee/ Wi-Fi + RF are available



Support both local storage and cloud storage



Color optional



Night vision



Certificate: CE/ FCC

Button Quantity: /

Sales Area: EU/ US

Standards: US Standard

Protocol: Zigbee

Working Temperature: -20°C to 40°C

Voltage: 110–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP30

Max Wattage: 800 W

Material: PC + Glass

Mounting Support: In-Wall Installation

Switch Function: /

Product Dimensions: 86 x 86 x 34 mm/ 120 x 76 x 33 mm

Distance: 20 m

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: White/ Black/ Champagne/ Silver

Button Type: Touch


[Back to Table of Contents →](#)

EU Smart Lighting Switch 3 Gang

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button




LED light indicator when turning off the appliances



Gradual on/ off



Memory of last state

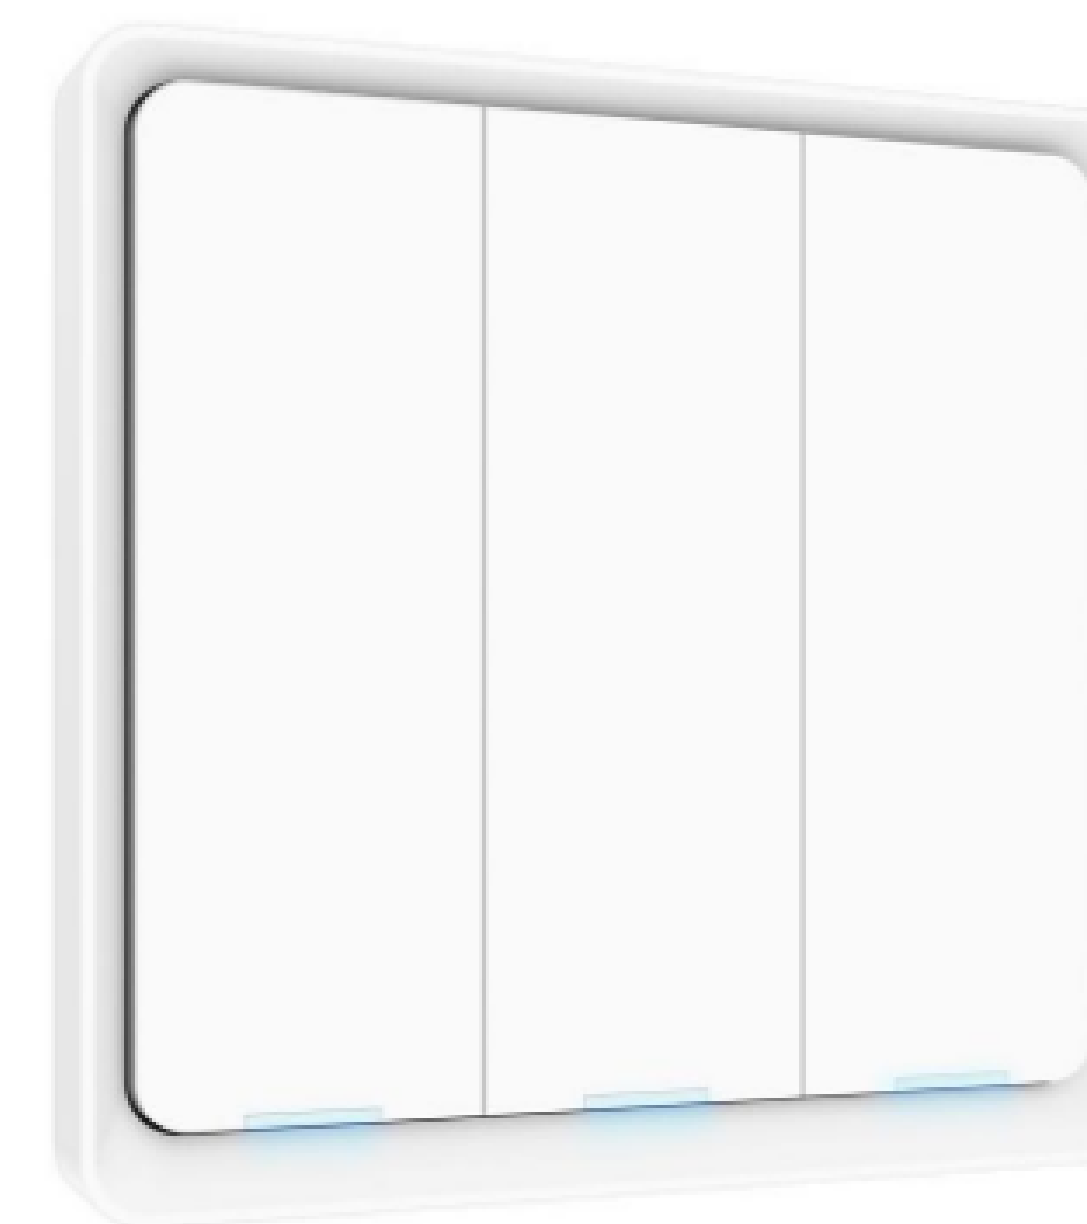

Certificate: CE/ RoHS

Button Quantity: 3 Gangs

Sales Area: Europe/ Asia

Standards: EU Standard

Protocol: Wi-Fi/ Zigbee/ BT Mesh

Working Temperature: -10°C to 45°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (CFL)/ 5-400 W (LED)

Material: PC

Mounting Support: In-Wall Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 39.5 mm

Distance:
Wi-Fi: 50 m
Zigbee: 30 m

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: White/ Grey/ Black/ Golden

Button Type: Button


[Back to Table of Contents →](#)

EU Smart Lighting Switch 2 Gang

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button



LED light indicator when turning off the appliances



Gradual on/ off



Memory of last state



Certificate: CE/ RoHS

Button Quantity: 2 Gangs

Sales Area: Europe/ Asia

Standards: EU Standard

Protocol: Wi-Fi/ Zigbee/ BT Mesh

Working Temperature: -10°C to 45°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (CFL)/ 5-400 W (LED)

Material: PC

Mounting Support: In-Wall Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 39.5 mm

Distance:
Wi-Fi: 50 m
Zigbee: 30 m

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: White/ Grey/ Black/ Golden

Button Type: Button


[Back to Table of Contents →](#)

EU Smart Lighting Switch 1 Gang

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button




LED light indicator when turning off the appliances



Gradual on/ off



Memory of last state

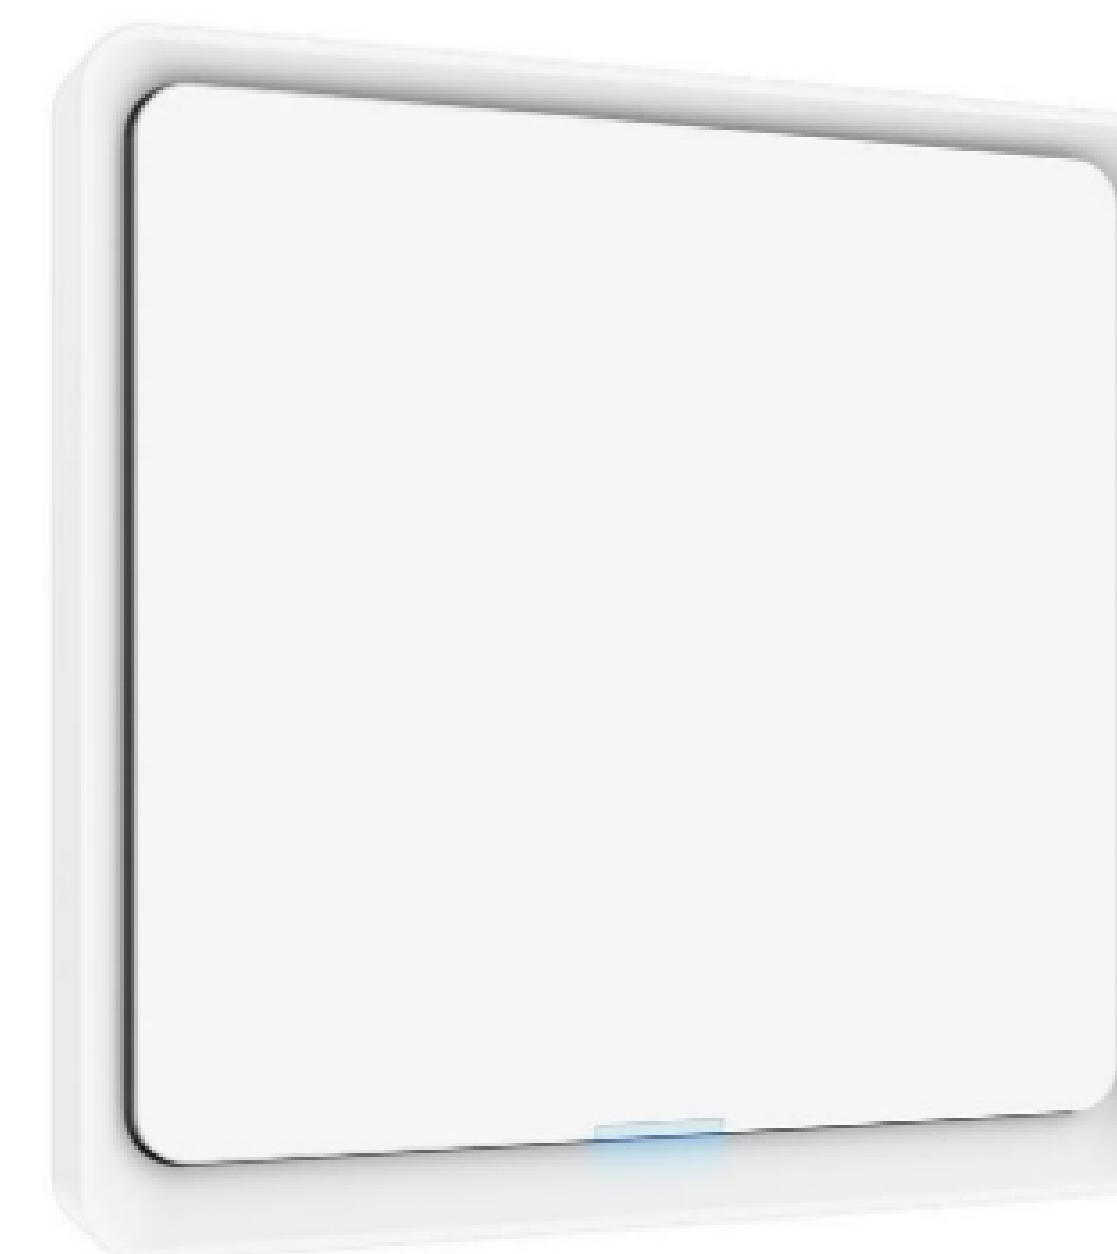

Certificate: CE/ RoHS

Button Quantity: 1 Gang

Sales Area: Europe/ Asia

Standards: EU Standard

Protocol: Wi-Fi/ Zigbee/ BT Mesh

Working Temperature: -10°C to 45°C

Voltage: 220–240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (CFL)/ 5–400 W (LED)

Material: PC

Mounting Support: In-Wall Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 39.5 mm

Distance:
Wi-Fi: 50 m
Zigbee: 30 m

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: White/ Grey/ Black/ Golden

Button Type: Button


[Back to Table of Contents →](#)

Zigbee Smart Switch Without Neutral Line

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button



LED light indicator when turning off the appliances



Gradual on/ off



Memory of last state



Certificate: CE/ RoHS

Button Quantity: 2 Gangs

Sales Area: Europe/ Asia

Standards: EU Standard

Protocol: Zigbee/ BT Mesh

Working Temperature: -10°C to 45°C

Voltage: 220-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 550 W (CFL)/ 5-120 W (LED)

Material: PC

Mounting Support: In-Wall Installation

Switch Function: Single Pole

Product Dimensions: 86 x 86 x 39.5 mm

Distance:
Wi-Fi: 50 m
Zigbee: 30 m

Wiring Configuration: No Neutral Required

Max Current: 8 A (Max)


Product Color: White/ Grey/ Black/ Golden

Button Type: Button


[Back to Table of Contents →](#)

Battery Powered Wireless Scene Switch 1/ 2/ 3/ 4 Gang


[Register and inquire to learn more →](#)




Smart control allow remote control smart appliances in network, with physical quite me chanical button




LED light indicator



Multiple actions each button, max support 12 actions one switch



Wireless battery powered, battery life last for 2 years

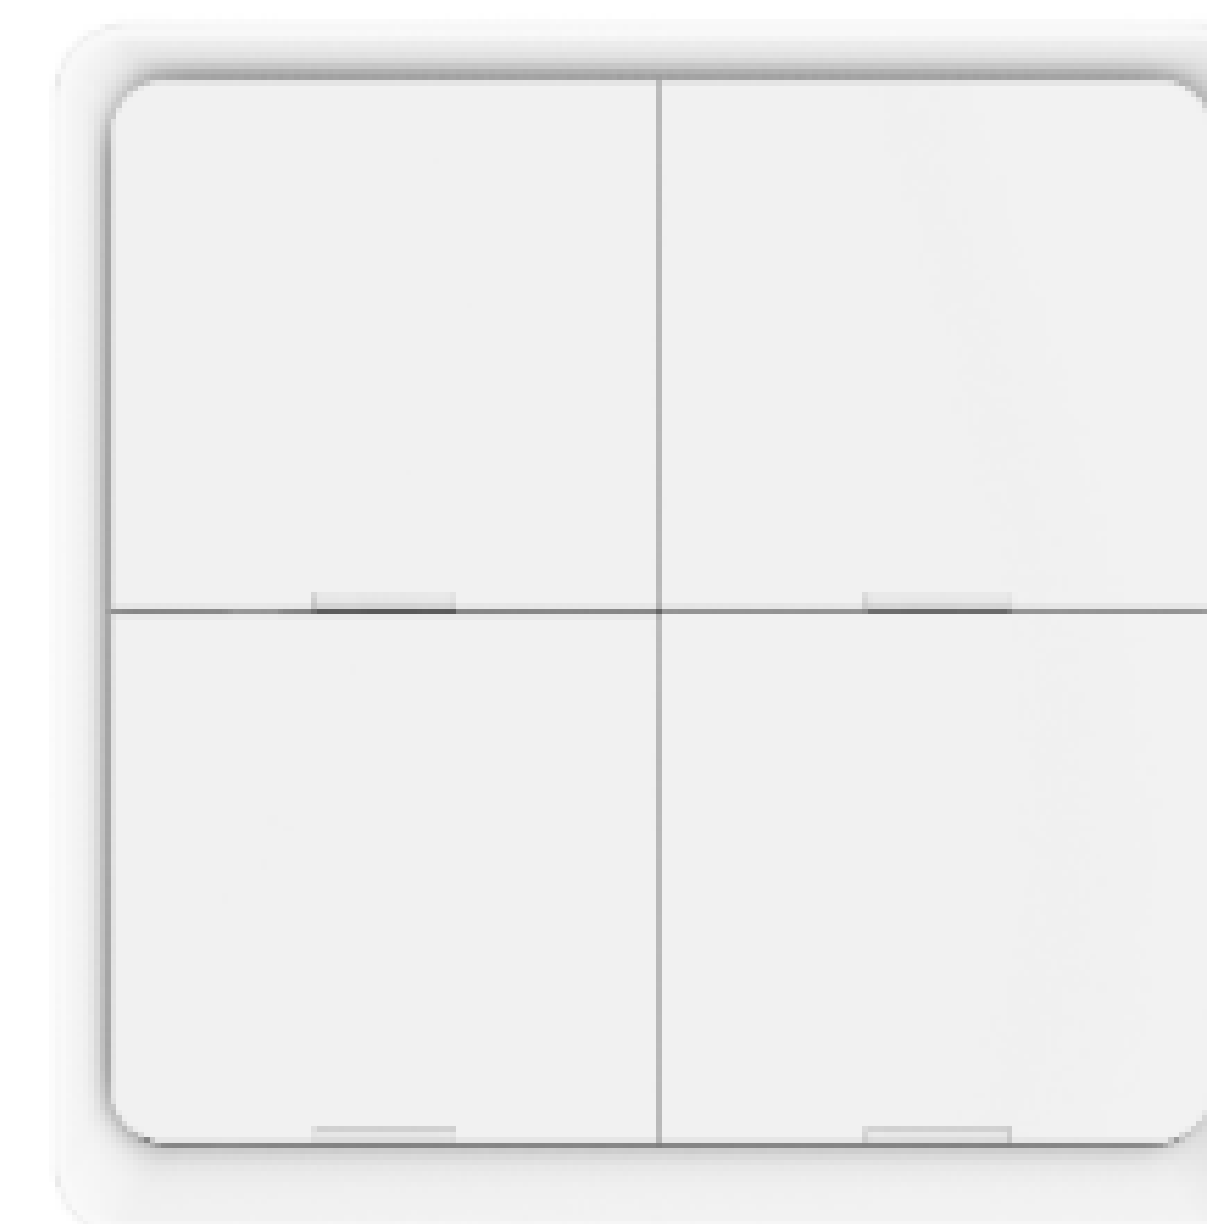


Certificate: CE/ RoHS	Button Quantity: 1/ 2/ 3/ 4 Gangs	Sales Area: Global
Standards: EU Standard	Protocol: Zigbee/ BT Mesh	Working Temperature: 0°C to 45°C
Voltage: Battery 6	Operation Environment: Indoor	IP Degree of Protection: IP20
Max Wattage: /	Material: PC	Mounting Support: Paste/ Mobile Use
Switch Function: /	Product Dimensions: 86 x 86 x 13 mm	Distance: Zigbee: 30 m
Wiring Configuration: Battery Power (CR2430 3 V)	Max Current: /	Product Color: White/ Grey/ Black/ Golden
Button Type: Button		

[Back to Table of Contents →](#)

Wi-Fi Touch Switch

[Register and inquire to learn more →](#)



Sensitive touch control



Support both Android and iOS



Glass panel design



Work great with holiday lights, lamps, fans...



Certificate: Applying RED

Button Quantity: 1 Gang

Sales Area: EU

Standards: EN Standard

Protocol: Wi-Fi Bluetooth

Working Temperature: -20°C to 41°C

Voltage: 100-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (Max)

Material: Glass

Mounting Support: Wall Flush Mounted

Switch Function: 1-Gang Switch

Product Dimensions: 85 x 85 x 35 mm

Distance: /

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)


Product Color: Glass

Button Type: Touch

[Back to Table of Contents →](#)

Wi-Fi Touch Switch

[Register and inquire to learn more →](#)



Sensitive touch control




Support both Android and iOS



Glass panel design



Work great with holiday lights, lamps, fans...

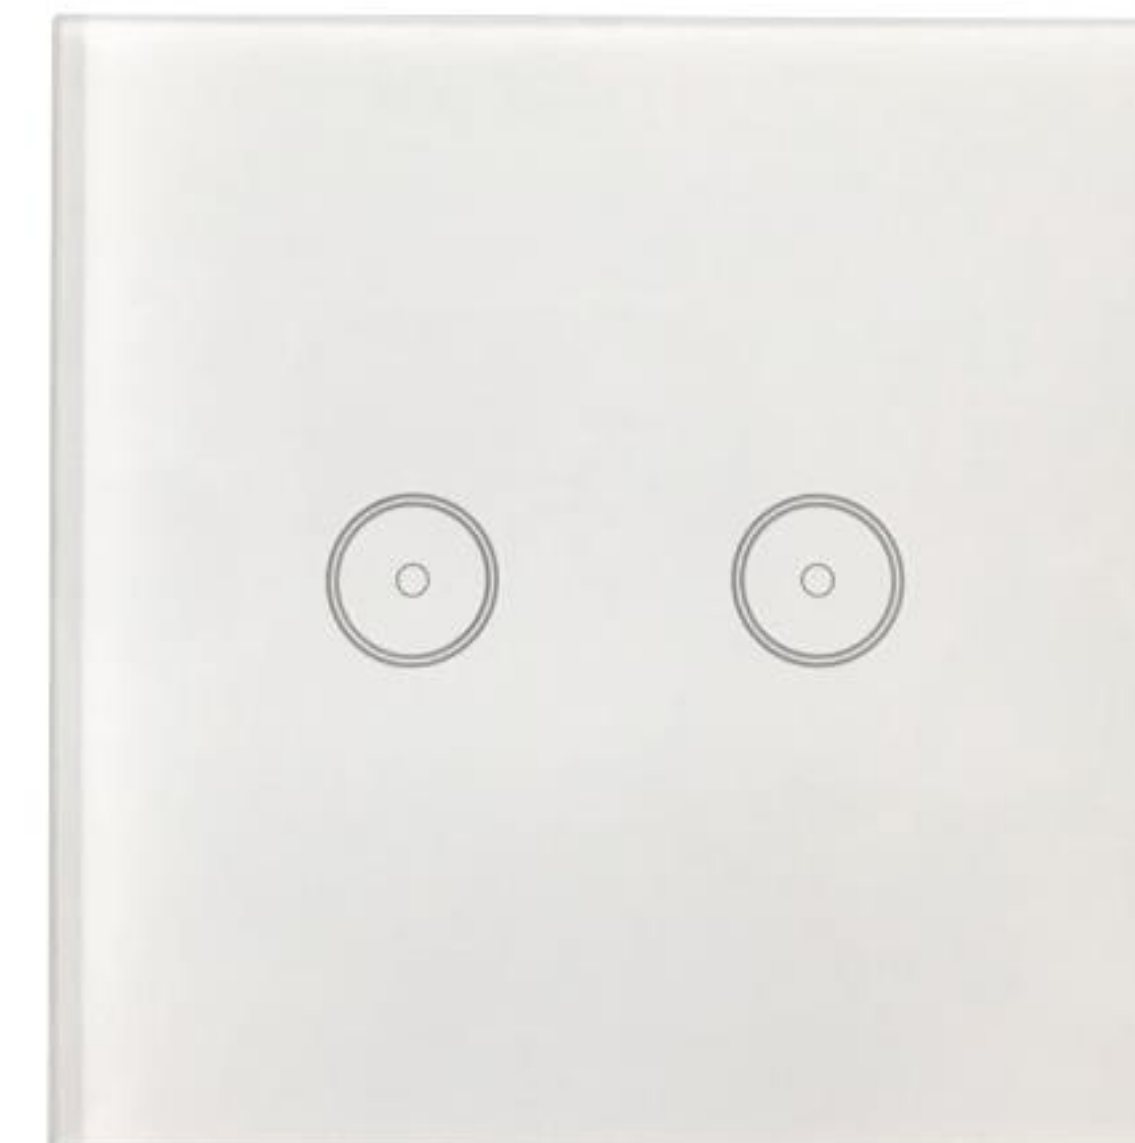

Certificate: Applying RED

Button Quantity: 2 Gangs

Sales Area: EU

Standards: EN Standard

Protocol: Wi-Fi Bluetooth

Working Temperature: -20°C to 41°C

Voltage: 100-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (Max)

Material: Glass

Mounting Support: Wall Flush Mounted

Switch Function: 2-Gang Switch

Product Dimensions: 85 x 85 x 35 mm

Distance: /

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: Glass

Button Type: Touch

[Back to Table of Contents →](#)

Wi-Fi Touch Switch

[Register and inquire to learn more →](#)



Support both Wi-Fi and press control



Support both Android and iOS



Work great with holiday lights, lamps, fans...



Certificate: Applying RED

Button Quantity: 1 Gang

Sales Area: EU

Standards: EN Standard

Protocol: Wi-Fi Bluetooth

Working Temperature: -20°C to 41°C

Voltage: 100-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (Max)

Material: PC

Mounting Support: Wall Flush Mounted

Switch Function: 1-Gang Switch

Product Dimensions: 85 x 85 x 35 mm

Distance: /

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)

Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Wi-Fi Touch Switch

[Register and inquire to learn more →](#)



Support both Wi-Fi and press control



Support both Android and iOS



Work great with holiday lights, lamps, fans...



Certificate: Applying RED

Button Quantity: 2 Gang

Sales Area: EU

Standards: EN Standard

Protocol: Wi-Fi Bluetooth

Working Temperature: -20°C to 41°C

Voltage: 100-240 V AC, 50/ 60 Hz

Operation Environment: Indoor

IP Degree of Protection: IP20

Max Wattage: 2000 W (Max)

Material: PC

Mounting Support: Wall Flush Mounted

Switch Function: 2-Gang Switch

Product Dimensions: 85 x 85 x 35 mm

Distance: /

Wiring Configuration: Neutral Required

Max Current: 10 A (Max)


Product Color: White

Button Type: Button

[Back to Table of Contents →](#)

Smart Lighting Dimmer Switch

[Register and inquire to learn more →](#)




Affordable 3-Way Solution
Work with regular 3 way switches,
no special companion switch needed



Remote app and, manual control ON/OFF
and smart dimmer switch, set schedules,
and run timers



Voice Control
Work with Amazon Alexa and Google
Assistant (sold separately) to enable voice control



ETL and FCC listed



Certificate: ETL/ FCC

Button Type: Rocker

Max Current: 500 W

Standards: US Standard

Button Quantity: 1 Gang

Sales Area: North America

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: 500 W

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: PC

Mounting Support: Wiring

Wiring Configuration: Neutral Required


Product Dimensions: 4.1 x 16.5 x 1.8 inch

Product Color: White

[Back to Table of Contents →](#)

Smart Dimmer Touch Switch Module – 1 CH

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (App Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Type: Touch

Max Current: /

Standards: IN Standard

Button Quantity: 1 Gang

Sales Area: South Asia

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: 800 W

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: Glass

Mounting Support: Wiring

Wiring Configuration: Neutral Required


Product Dimensions: 45 x 45 mm

Product Color: White/ Black

[Back to Table of Contents →](#)

Smart Dimmer Touch Switch Module – 2 CH

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, damp proof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (App Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required.



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/ off automatically. This smart light switch has several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Type: Touch

Max Current: /

Standards: IN Standard

Button Quantity: 2 Gangs

Sales Area: South Asia

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: 500 W x 2

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: Glass

Mounting Support: Wiring

Wiring Configuration: Neutral Required


Product Dimensions: 45 x 45 mm

Product Color: White/ Black

[Back to Table of Contents →](#)

Smart On/ Off Toggle Dimmer Switch

[Register and inquire to learn more →](#)




Affordable 3-Way Solution
Work with regular 3 way switches,
no special companion switch needed



Voice Control
Work with Amazon Alexa and Google
Assistant (sold separately) to enable voice control



Remote Operation
Control the device remotely with your smartphone when
connected to a 2.4G Wi-Fi network or enjoy manual
ON/OFF & Dimmer operation from the switch. Home
automation is simple through setting schedules and
running timers



ETL and FCC listed



Certificate: ETL/ FCC

Button Type: Toggle

Max Current: 500 W

Standards: US Standard

Button Quantity: 1 Gang

Sales Area: North America

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: 500 W

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: PC

Mounting Support: Wiring

Wiring Configuration: Neutral Required

Product Dimensions: 4.1 x 16.5 x 1.8 inch

Product Color: White


[Back to Table of Contents →](#)

Smart Wi-Fi Dimmer Switch

[Register and inquire to learn more →](#)




Smart phone remote control



Waterproof panel




One key on/ off



Timing switch, adjust lighting intensity



Power metering



Widely compatible with Mos-FET



Certificate: CE/ FCC/ RoHS

Button Type: Touch Sensitive

Max Current: /

Standards: EU Standard

Button Quantity: 3 Gang

Sales Area: Global

Voltage: 85–250 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C (32°F to 104°F)

Max Wattage: /

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: PC + ABS

Mounting Support: /

Wiring Configuration: Live Wire + Neutral Wire

Product Dimensions: 86 x 86 x 34 mm

Product Color: White


[Back to Table of Contents →](#)

Smart Dimmer Switch

[Register and inquire to learn more →](#)




Smart phone remote control



Waterproof panel




One key on/ off



Timing switch, adjust lighting intensity



Power metering



Widely compatible with Mos-FET



Certificate: FCC-ID/ ETL

Button Type: Button

Max Current: 4 A (Max)

Standards: US Standard

Button Quantity: 1 Gang

Sales Area:
North America
South America

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 85°C

Max Wattage: 400 W (INC) / 150 W (LED) / 150 W (CFL)

Operation Environment: Indoor

IP Degree of Protection: V-0 (UL94)

Load Type:
Dimmable LED
INC
Dimmable CFL

Material: ABS + PC

Mounting Support: Wall Mounted

Wiring Configuration: Neutral Required

Product Dimensions: 128.17 x 84.17 x 41.25 mm

Product Color: White

[Back to Table of Contents →](#)


Smart Dimmer Switch

[Register and inquire to learn more →](#)



Dimmable

Support LED (150 W max), CFL (150 W max), INC (400 W max) bulbs.




Memory

It will remember the status of the switch, including the brightness level. The switch will recover to the last status after power outage



High-tech control (remote & voice)



Temperature Protection

The build-in temperature sensor will detect the temperature of the switch and stop it to protection mode if it is too high



Soft ON/ OFF

When turning on/off the switch, lights will on/off gradually. It protects both light bulbs and eyes



Free app for iOS and Android & multi-languages support



Certificate: FCC-ID/ ETL

Button Type: Button

Max Current: 4 A (Max)

Standards: US Standard

Button Quantity: 1 Gang

Sales Area:
North America
South America

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: -20°C to 85°C

Max Wattage: 400 W (INC) / 150 W (LED) / 150 W (CFL)

Operation Environment: Indoor

IP Degree of Protection: V-0(UL94)

Load Type:
Dimmable LED
INC
Dimmable CFL

Material: ABS + PC

Mounting Support: Wall Mounted

Wiring Configuration: Neutral Required

Product Dimensions: 128.17 x 84.17 x 39.5 mm

Product Color: White


[Back to Table of Contents →](#)

Smart Sliding Dimmer Switch


[Register and inquire to learn more →](#)



Trailing edge dimmer



Temperature protection



Memory function



Soft ON/ OFF



High-tech control (remote & voice)



Certificate: FCC-ID

Button Type: Touch

Max Current: 4 A (Max)

Standards: US Standard

Button Quantity: 1 Gang

Sales Area:
North America
South America

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: -20°C to 85°C

Max Wattage: 400 W (INC) / 150 W (LED) / 150 W (CFL)

Operation Environment: Indoor

IP Degree of Protection: V-0 (UL94)

Load Type:
Dimmable LED
INC
Dimmable CFL

Material: ABS + PC

Mounting Support: Wall Mounted

Wiring Configuration: Neutral Required

Product Dimensions: 128.17 x 84.17 x 40.6 mm

Product Color: White


[Back to Table of Contents →](#)

EU Smart Touch Dimmer Switch

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button



LED light indicator when turn off the appliances



Gradual on/ off



Memory of last state



Certificate: CE/ RoHS

Button Type: Touch/ Button

Max Current: 2 A (Max)

Standards: EU Standard

Button Quantity: 1 Gang

Sales Area: Europe/ Asia

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Zigbee/ BT Mesh

Working Temperature: –10°C to 45°C

Max Wattage:
400 W (INC) / 250 W (LED) / 250 W (CFL) / 250 W (FAN)

Operation Environment: Indoor

IP Degree of Protection: IP20

Load Type:
Incandescent Lamp
Dimmable LED Lamp
Electronic Energy Saving Lamp
Electric Fan

Material: PC

Mounting Support: In-Wall

Wiring Configuration: Neutral Required

Product Dimensions: 86 x 86 x 43 mm

Product Color: White


[Back to Table of Contents →](#)

EU Smart Touch Dimmer Switch

[Register and inquire to learn more →](#)



Smart control including smart phone remote control & smart speaker voice control, with physical quite mechanical button



LED light indicator when turn off the appliances



Gradual on/ off



Memory of last state



Certificate: CE/ RoHS

Button Type: Button/ Knob

Max Current: 2 A (Max)

Standards: EU Standard

Button Quantity: 1 Gang

Sales Area: Europe/ Asia

Voltage: 220–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Zigbee/ BT Mesh

Working Temperature: –10°C to 45°C

Max Wattage:
400 W (INC) / 250 W (LED) / 250 W (CFL) / 250 W (FAN)

Operation Environment: Indoor

IP Degree of Protection: IP20

Load Type:
Incandescent Lamp
Dimmable LED Lamp
Electronic Energy Saving Lamp
Electric Fan

Material: PC

Mounting Support: In-wall

Wiring Configuration: Neutral Required

Product Dimensions: 86 x 86 x 54 mm

Product Color: White

[Back to Table of Contents →](#)

EU Smart Rotary Dimmer Switch

[Register and inquire to learn more →](#)




Mobile remote control




Timing



Countdown



Sharing



Dimmer



Certificate: FCC/ ETL

Button Type: Button

Max Current: 15 A (Max)

Standards: US standard

Button Quantity: 1 Gang

Sales Area: North America/ South America/ Southeast Asia

Voltage: 110–125 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: -20°C to 75°C

Max Wattage:
INC 500 W (Max)
LED 150 W (Max)

Operation Environment: Indoor

IP Degree of Protection: Level 1

Load Type: /

Material: 100% PC Fireproof Material

Mounting Support: In-Wall

Wiring Configuration: Neutral + Live Wire

Product Dimensions: 125 x 80 x 42 mm

Product Color: White

Dimmer Switch

Product Catalogue 2020
Special Edition



[Back to Table of Contents →](#)

Dimmer Switch


[Register and inquire to learn more →](#)



Dim lights from multiple locations



Push arrows once to turn lights on/off or hold down to increase/ decrease light level




Air-gap switch cuts off power to the switch



Impact-resistant polycarbonate thermoplastic



Dimmable LED: 150 W,
Incandescent or halogen: 600W



UL listed. 120 V AC;
neutral wire required



Certificate: UL/ RoHS

Button Type: Button/ Rocker

Max Current: 15 A

Standards: US Standard

Button Quantity: 1 Gang

Sales Area: South America/ Canada

Voltage: 120 V AC, 60 Hz

Protocol: Wi-Fi

Working Temperature: /

Max Wattage: Frequency: 908.42 MHz

Operation Environment: Indoor

IP Degree of Protection: /

Load Type: /

Material: PC Cover + Copper Accessary

Mounting Support: In-Wall

Wiring Configuration: Neutral Required

Product Dimensions: 112 x 51.8 x 47.5 mm

Product Color: White/ Iron/ Gray


[Back to Table of Contents →](#)

Wi-Fi Control Dimmer Switch

[Register and inquire to learn more →](#)



Sensitive touch control



Adjust brightness flowing



Support both Android and iOS



Glass panel design



Certificate: Applying RED

Button Type: Touch

Max Current: 10 A (Max)

Standards: EN Standard

Button Quantity: 1 Gang

Sales Area: EU

Voltage: 220–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 41°C

Max Wattage: 2000 W (Max)

Operation Environment: Indoor

IP Degree of Protection: IP20

Load Type: LED Lamp

Material: Glass

Mounting Support: Wall Flush Mounted

Wiring Configuration: Neutral Required/No Neutral Required

Product Dimensions: 85 x 85 x 35 mm

Product Color: Glass White


[Back to Table of Contents →](#)

Wi-Fi Control Dimmer Switch

[Register and inquire to learn more →](#)



Support both Wi-Fi and press control



Adjust brightness flowing



Support both Android and iOS



Work great with holiday lights, lamps, fans...



Certificate: Applying RED

Button Type: Button

Max Current: 10 A (Max)

Standards: EN Standard

Button Quantity: 1 Gang

Sales Area: EU

Voltage: 220–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 41°C

Max Wattage: 2000 W (Max)

Operation Environment: Indoor

IP Degree of Protection: IP20

Load Type: LED Lamp

Material: Glass

Mounting Support: Wall Flush Mounted

Wiring Configuration: Neutral Required/No Neutral Required


Product Dimensions: 85 x 85 x 35 mm

Product Color: White

[Back to Table of Contents →](#)

Wi-Fi Window Shutter Switch

[Register and inquire to learn more →](#)



Sensitive touch control



Open & close the curtain flowing



Support both Android and iOS



Glass panel design



Certificate: Applying RED

Button Type: Touch

Max Current: 10 A (Max)

Standards: EN Standard

Distance: /

Sales Area: EU

Voltage: 220–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 40°C

Max Wattage: 2000 W (Max)

Operation Environment: Indoor

IP Degree of Protection: IP20

Motor Type: /

Material: Glass

Mounting Support: Wall Flush Mounted

Wiring Configuration: Neutral Required

Product Dimensions: 85 x 85 x 35 mm

Product Color: Glass

[Back to Table of Contents →](#)

Wi-Fi Window Shutter Switch

[Register and inquire to learn more →](#)



Support both Wi-Fi and press control



Open & close the curtain flowing



Support both Android and iOS



Work great with holiday lights, lamps, fans...



Certificate: Applying RED

Button Type: Botton

Max Current: 10 A (Max)

Standards: EN Standard

Distance: /

Sales Area: EU

Voltage: 220–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 40°C

Max Wattage: 2000 W (Max)

Operation Environment: Indoor

IP Degree of Protection: IP20

Motor Type: /

Material: Glass

Mounting Support: Wall Flush Mounted

Wiring Configuration: Neutral Required

Product Dimensions: 80 x 80 x 35 mm

Product Color: White

[Back to Table of Contents →](#)

Smart Wi-Fi Curtain Switch Glass Panel Touch

Curtain Switch Silver


[Register and inquire to learn more →](#)




Auto-connection to Wi-Fi after power recovery



Support both local storage and cloud storage



Color optional



Night vision



Certificate: CE/ FCC

Button Type: Touch

Max Current: 10 A (Max)

Standards: EN Standard

Distance: 20 m

Sales Area: EU/ US

Voltage: 110–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –20°C to 40°C

Max Wattage: 400 W (INC)

Operation Environment: Indoor

IP Degree of Protection: IP30

Motor Type: /

Material: PC + GLASS

Mounting Support: In-Wall Installation

Wiring Configuration: Neutral Required


Product Dimensions: 86 x 86 x 34 mm/ 120 x 76 x 33 mm

Product Color: White/ Black/ Champagne/ Silver


[Back to Table of Contents →](#)

Wi-Fi Curtain Switch


[Register and inquire to learn more →](#)



Product name: smart curtain switch




Color shape: white



Input voltage: 100–240 V AC, 50–60 HZ




WIFI standard: 802.11b/ g/ n 2.4 GHz



Control mode: touch control, app control,
and voice control



Main functions: remote control on and off;
timing function

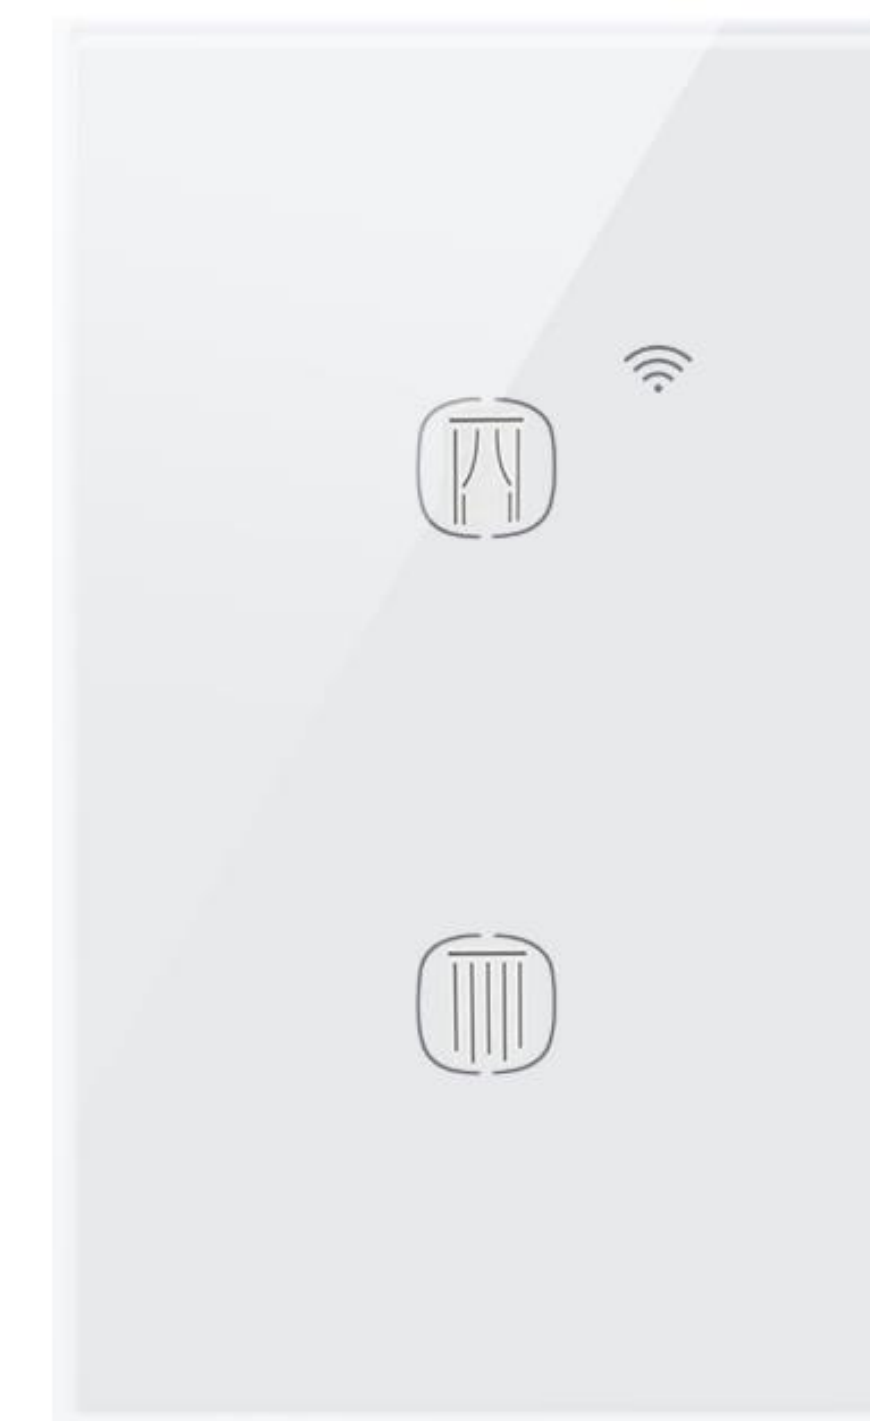

Certificate: CE/ FCC/ ROHS

Button Type: Touch Control

Max Current: 10 A (Max)

Standards: US Standard

Distance: /

Sales Area: US

Voltage: 100–240 V AC

Protocol: Wi-Fi

Working Temperature: –25°C to 65°C

Max Wattage: 500 W/ Gang Max

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Tempered Glass + PC (Aluminum frame is optional)

Mounting Support: In-Wall Installation

Wiring Configuration: Neutral Required


Product Dimensions: 70 x 120 x 34 mm

Product Color: White/ Black/ Gold


[Back to Table of Contents →](#)

Wi-Fi Curtain Switch


[Register and inquire to learn more →](#)



Product name: smart curtain switch




Color shape: white



Input voltage: 100–240 V AC, 50–60 HZ




WIFI standard: 802.11b/ g/ n 2.4 GHz



Control mode: touch control, app control,
and voice control



Main functions: remote control on and off;
timing function

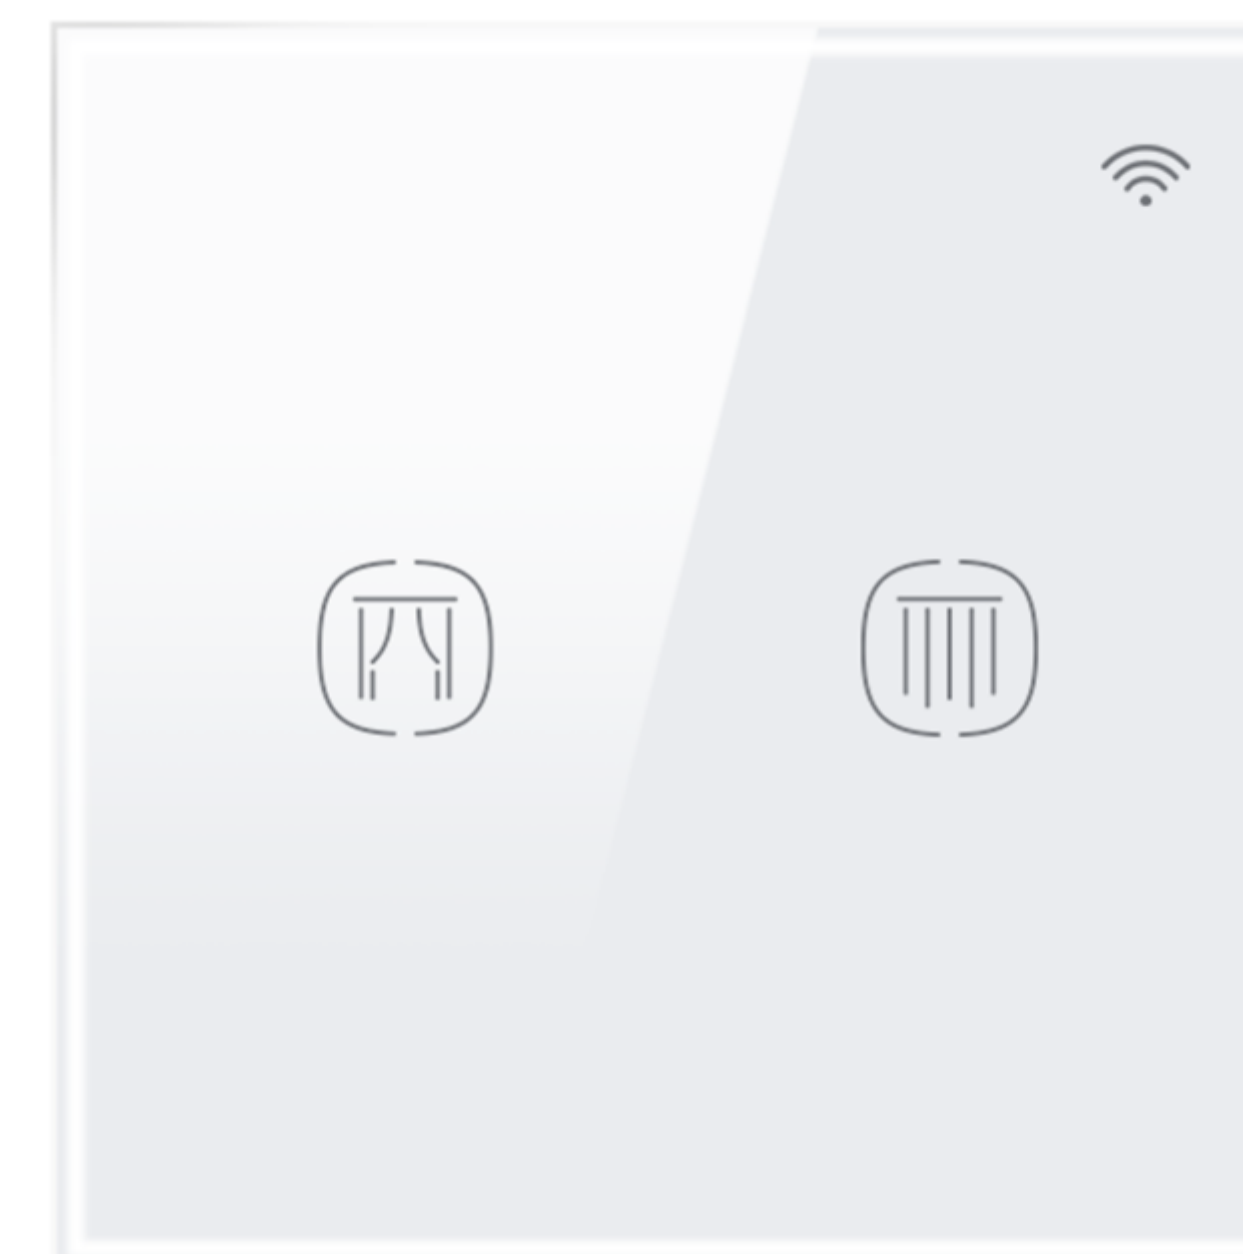

Certificate: CE/ FCC/ ROHS

Button Type: Touch Control

Max Current: 10 A (Max)

Standards: UK Standard

Distance: /

Sales Area: UK

Voltage: 100–240 V AC

Protocol: Wi-Fi

Working Temperature: –25°C to 65°C

Max Wattage: 500 W/ Gang Max

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Tempered Glass + PC (Aluminum frame is optional)

Mounting Support: In-Wall Installation

Wiring Configuration: Neutral Required


Product Dimensions: 86 x 86 x 34 mm

Product Color: White/ Black/ Gold


[Back to Table of Contents →](#)

Wi-Fi Curtain Switch


[Register and inquire to learn more →](#)



Product name: smart curtain switch




Color shape: white



Input voltage: 100–240 V AC, 50–60 HZ



WIFI standard: 802.11b/ g/ n 2.4 GHz



Control mode: touch control, app control,
and voice control



Main functions: remote control on and off;
timing function



Certificate: CE/ FCC/ ROHS

Button Type: Touch Control

Max Current: 10 A (Max)

Standards: UK Standard

Distance: /

Sales Area: UK

Voltage: 100–240 V AC

Protocol: Wi-Fi

Working Temperature: –25°C to 65°C

Max Wattage: 500 W/ Gang Max

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Tempered Glass + PC (Aluminum frame is optional)

Mounting Support: In-Wall Installation

Wiring Configuration: Neutral Required


Product Dimensions: 86 x 86 x 34 mm

Product Color: White/ Black/ Gold


[Back to Table of Contents →](#)

Wi-Fi Curtain Switch


[Register and inquire to learn more →](#)



Product name: smart curtain switch




Color shape: white



Input voltage: 100–240 V AC, 50–60 HZ



WIFI standard: 802.11b/ g/ n 2.4 GHz



Control mode: touch control, app control, and voice control



Main functions: remote control on and off; timing function



Certificate: CE/ FCC/ ROHS

Button Type: Touch Control

Max Current: 10 A (Max)

Standards: UK Standard

Distance: /

Sales Area: UK

Voltage: 100-240 V AC

Protocol: Wi-Fi

Working Temperature: -25°C to 65°C

Max Wattage: 500 W/ Gang Max

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Tempered Glass + PC (Aluminum frame is optional)

Mounting Support: In-Wall Installation

Wiring Configuration: Neutral Required


Product Dimensions: 86 x 86 x 34 mm

Product Color: White/ Black/ Gold

[Back to Table of Contents →](#)

Smart Touch Curtain Controller – 1 CH

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, dampproof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (App Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required




Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Type: Touch

Max Current: 5 A

Standards: IN Standard

Distance: Up to 100 Feet Line of Sight

Sales Area: South Asia

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: /

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Glass

Mounting Support: Wiring

Wiring Configuration: Neutral Required


Product Dimensions: 45 x 45 mm

Product Color: White/ Black

[Back to Table of Contents →](#)

Smart Touch Curtain Controller – 2 CH

[Register and inquire to learn more →](#)




Ultimate Beauty

Ingenuity design assures highly texture beauty, toughened glass surface prevents the scratch from knives or something hard, dampproof available for humid operation



Wi-Fi Remote Control

You can use the Smart Life app (App Store or Google Play) in your smart phone to control the wall switch wirelessly with 2.4G Wi-Fi. No hub required



Note
Neutral wire required



Voice Control

Once you have this switch, you can connect it with Amazon Alexa (Amazon Echo/dot/tap) or Google Assistant for voice control



Timing Function

Take full control of your home or office lights thanks to the schedule timer that will allow you to plan the exact time to turn lights and appliances on/off automatically. This smart light switch have several control sites shared by different family members



Work with Roma Locking



Certificate: RoHS

Button Type: Touch

Max Current: 5 A x 2

Standards: IN Standard

Distance: Up to 100 Feet Line of Sight

Sales Area: South Asia

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: 0°C to 40°C

Max Wattage: /

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Glass

Mounting Support: Wiring

Wiring Configuration: Neutral Required

Product Dimensions: 45 x 45 mm

Product Color: White/ Black

[Back to Table of Contents →](#)

Wi-Fi Curtain Switch

[Register and inquire to learn more →](#)



App control



Voice control



Power metering function



Certificate: SAA/ CE/ RoHS

Button Type: Touch

Max Current: 10 A

Standards: US Standard

Distance: No Limitation

Sales Area: Global

Voltage: 110–240 V AC

Protocol: Wi-Fi

Working Temperature: /

Max Wattage: 1000 W/ Gang

Operation Environment: Indoor

IP Degree of Protection: /

Motor Type: /

Material: Tempered Glass

Mounting Support: /

Wiring Configuration: Neutral Required

Product Dimensions: 120 x 72 x 43 mm

Product Color: White/ Black


[Back to Table of Contents →](#)

Smart Breaker-2M

[Register and inquire to learn more →](#)



Applicable products: energy saving lamps, fluorescent lamps, LED lamps and other lighting



Standby power consumption: ≤ 0.5 W



Certificate: CE/ RoHS	Button Type: /	Max Current: 10 A (Max)
Standards: Universal	Switch Function: /	Sales Area: Global
Voltage: 220–240 V AC, 50/ 60 Hz	Protocol: Wi-Fi	Working Temperature: /
Max Wattage: 2400 W (Max)	Operation Environment: Indoor	Mounting Support: /
Load Type: /	Material: Plastic	Product Color: White
Wiring Configuration: /	Product Dimensions: 60 x 29 x 22 mm	


[Back to Table of Contents →](#)

Smart Lighting Switch

[Register and inquire to learn more →](#)



Smart phone APP wireless control household appliance from anywhere



Energy meter function is available to know how much power consume




Timer, countdown, schedules, share device, great group, smart scene and automations, setting and organised with other smart devices, help you achieve home automation easily




Voice control support Amazon Alex, Google Assistant and IFTTT



Reserve functions of traditional manual switch, manual control is synchronous on smart phone app



Compatible with RF remote controller

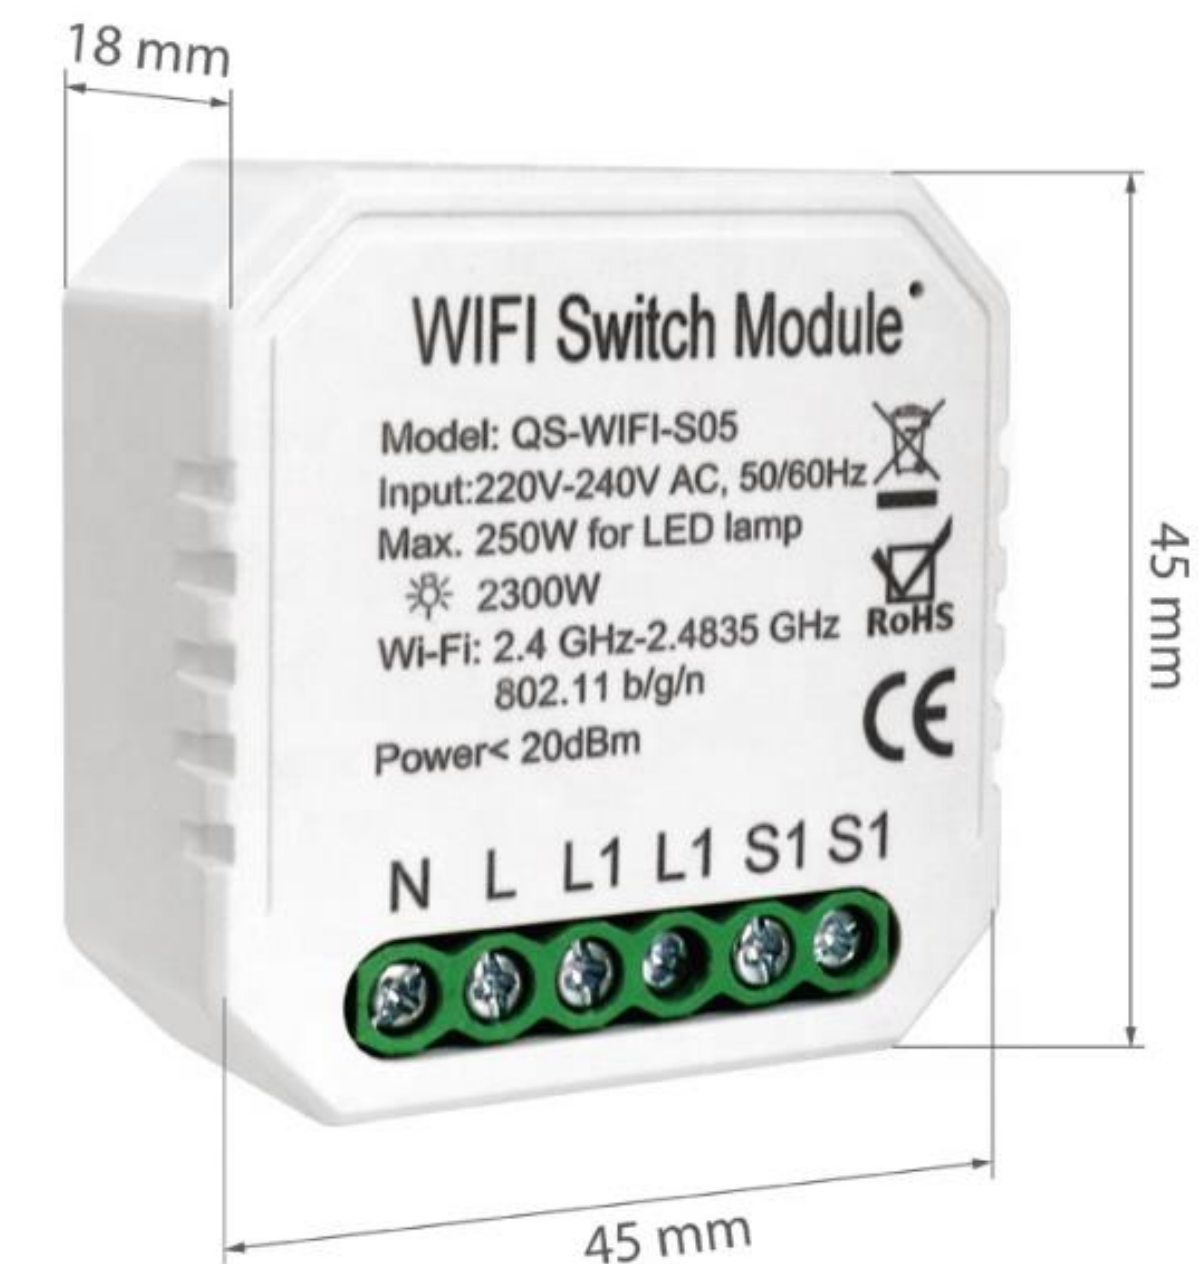

Certificate: CE/ RoHS

Button Type: Rocker

Max Current: 10 A (Max)

Standards: EU UK US AU Standard

Switch Function: 1 Channel

Sales Area: EU/ US/ AU

Voltage: 100–240 V AC, 50/ 60 Hzz

Protocol: Wi-Fi/ Bluetooth/ Zigbee

Working Temperature: –10°C to 40°C

Max Wattage: 2300 W/ 250 W for LED

Operation Environment: Indoor

Mounting Support: Built-in Switch Box or Hang nn Wall

Load Type: Household Appliance/ LED Lights

Material: PCB + ABS

Product Color: White/ Blue/ Purple/ Black/ Customized Color

Wiring Configuration: AC Power Supplier

Product Dimensions: 46 x 46 x 18 mm


[Back to Table of Contents →](#)

2 Gangs Smart Wi-Fi Switch Module

[Register and inquire to learn more →](#)



Smart phone APP wireless control household appliance from anywhere



Independently control 2 channels



Timer, countdown, schedules, share device, great group, smart scene and automations, setting and organised with other smart devices, help you achieve home automation easily




Voice control support Amazon Alex, Google Assistant and IFTTT



Reserve functions of traditional manual switch, manual control is synchronous on smart phone app



Compatible with RF remote controller

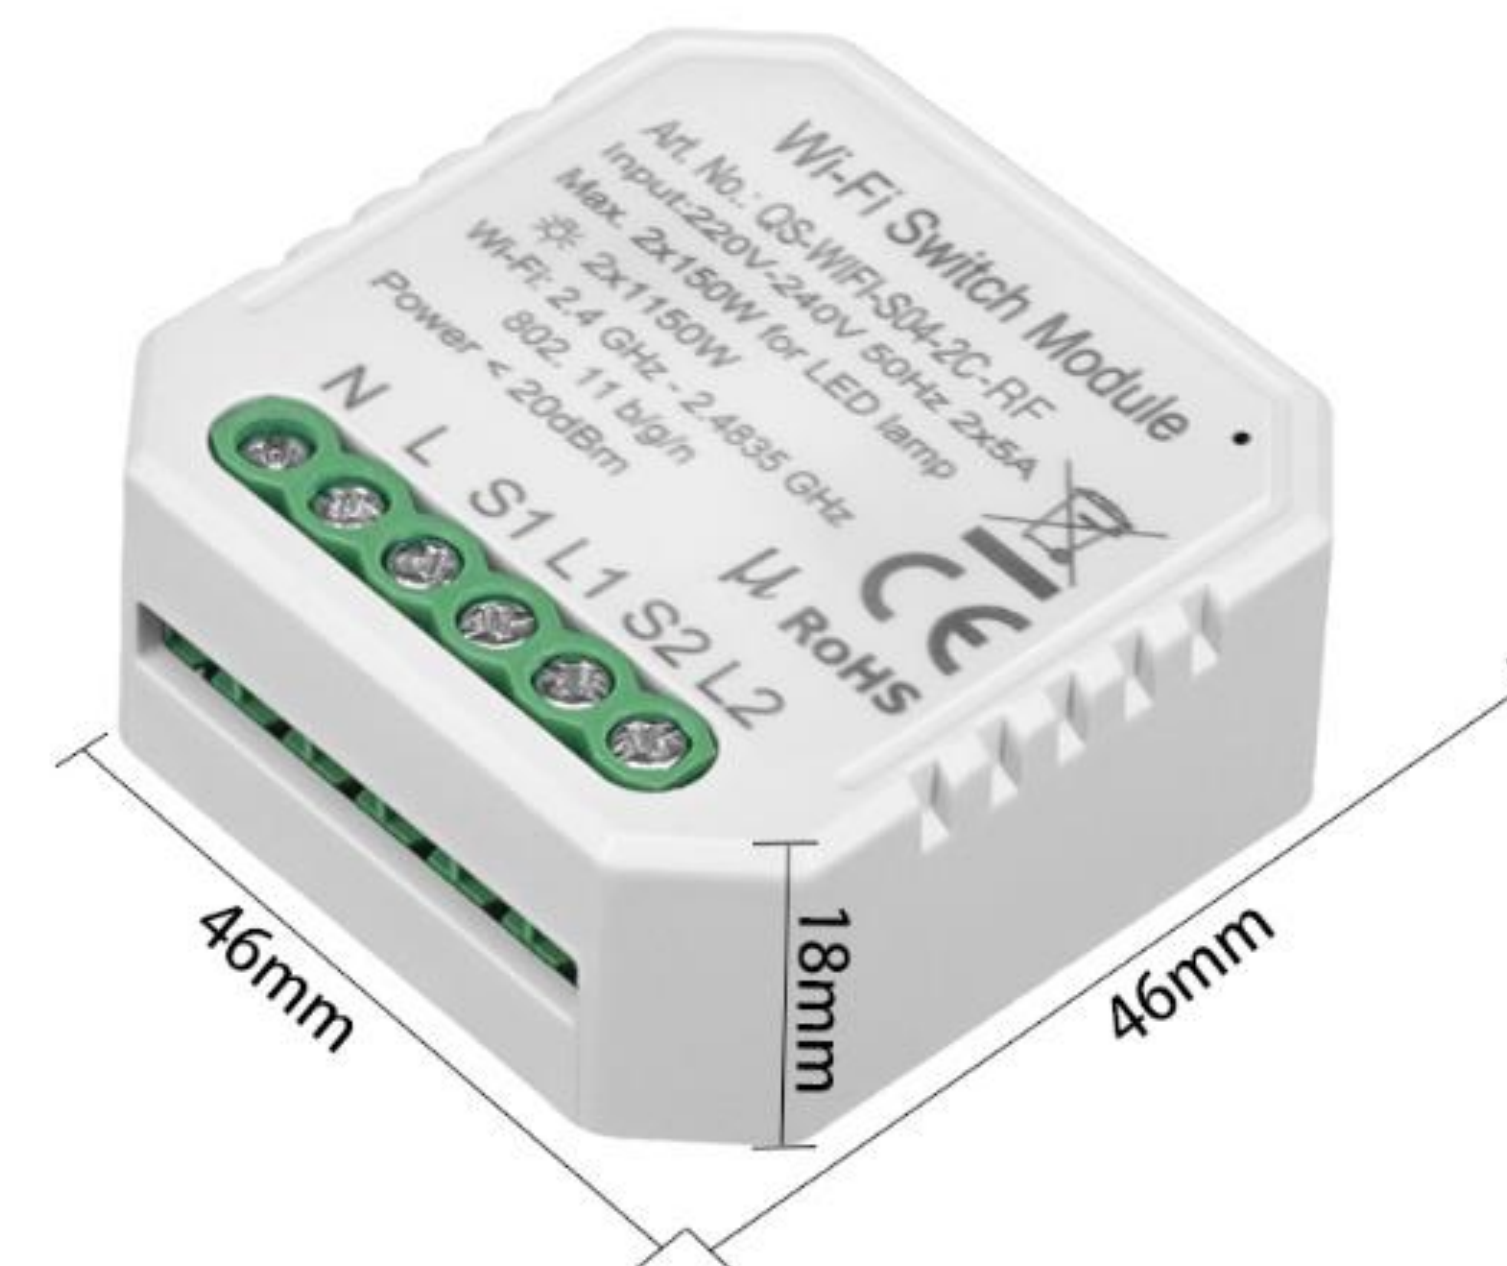

Certificate: CE/ RoHS

Button Type: Rocker

Max Current: 5 A x 2 (Max)

Standards: EU UK US AU Standard

Switch Function: 2 Channels

Sales Area: EU/ US/ AU

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Bluetooth/ Zigbee

Working Temperature: –10°C to 40°C

Max Wattage: 2 x 1150 W/ 2 x 150 W for LED

Operation Environment: Indoor

Mounting Support: Built-in Switch Box Or Hang On Wall

Load Type: Household Appliance/ LED Lights

Material: PCB + ABS

Product Color: White/ Blue/ Purple/ Black/ Customized Color

Wiring Configuration: AC Power Supplier

Product Dimensions: 46 x 46 x 18 mm

[Back to Table of Contents →](#)

Smart Wi-Fi Dimmer Switch Module

[Register and inquire to learn more →](#)



Smart phone APP wireless control home lights from anywhere



Light brightness automatically changed to desired level at different time as setting




Timer, countdown, schedules, share device, great group, smart scene and automations, setting and organised with other smart devices, help you achieve home automation easily



Voice control support Amazon Alex, Google Assistant and IFTTT



Reserve functions of traditional manual switch, manual control is synchronous on smart phone app



Compatible with RF remote controller



Certificate: CE/ RoHS

Button Type: Push

Max Current: 680 mA (Max)

Standards: EU UK US AU Standard

Switch Function: 1 Channel

Sales Area: EU/ US/ AU

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Bluetooth/ Zigbee

Working Temperature: –10°C to 40°C

Max Wattage: 150 W (LED)

Operation Environment: Indoor

Mounting Support: Built-in Switch Box Or Hang On Wall

Load Type:
TRIAC LED Light
Incandescent Light and Halogen Light

Material: PCB + ABS

Product Color: White/ Blue/ Purple/ Black/ Customized Color


Wiring Configuration: AC Power Supplier

Product Dimensions: 46 x 46 x 18 mm

[Back to Table of Contents →](#)

2 Gangs Smart Dimmer Switch Module

[Register and inquire to learn more →](#)



Independently control 2 channels home lights from anywhere by smart phone app




Voice control support Amazon Alex, Google Assistant and IFTTT




Light brightness automatically changed to desired level at different time as setting



Reserve functions of traditional manual switch, manual control is synchronous on smart phone app



Timer, countdown, schedules, share device, great group, smart scene and automations, setting and organised with other smart devices, help you achieve home automation easily



Compatible with RF remote controller



Certificate: CE/ RoHS

Button Type: Push

Max Current: Max 2 x 450 mA

Standards: EU UK US AU Standard

Switch Function: 2 Channels

Sales Area: EU/ US/ AU

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Bluetooth/ Zigbee

Working Temperature: –10°C to 40°C

Max Wattage: 2 x 100 W (LED)

Operation Environment: Indoor

Mounting Support: Built-in Switch Box Or Hang On Wall

Load Type:
TRIAC LED Light
Incandescent Light and Halogen Light

Material: PCB + ABS

Product Color: White/ Blue/ Purple/ Black/ Customized Color


Wiring Configuration: AC Power Supplier

Product Dimensions: 46 x 46 x 18 mm

[Back to Table of Contents →](#)

Smart Wi-Fi Curtain Switch Module

[Register and inquire to learn more →](#)



Widely applications, working with curtain,blinds, roller shutter, garage door, etc



Voice control support Amazon Alex, Google Assistant and IFTTT




Timer, countdown, schedules, share device, great group, smart scene and automations, setting and organised with other smart devices, help you achieve home automation easily




Smart phone app wireless control movement (open/ close, up/ down, start/ stop) of electric motors from anywhere



Reserve functions of traditional manual switch, manual control is synchronous on smart phone app



Compatible with RF remote controller

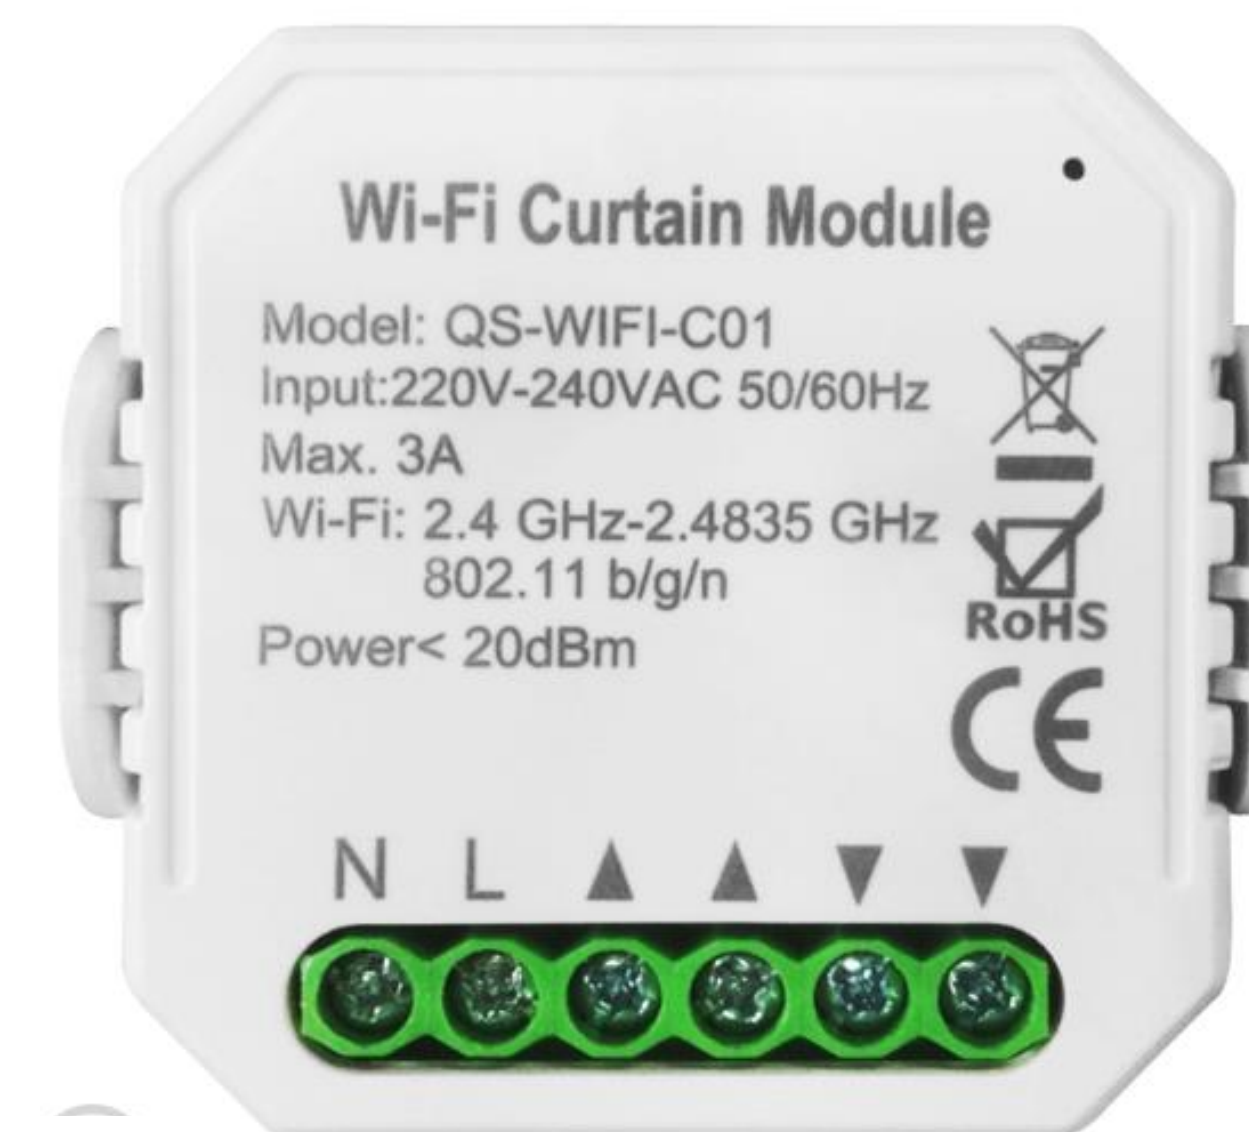

Certificate: CE/ RoHS

Button Type: Rocker

Max Current: 3 A (Max)

Standards: EU UK US AU Standard

Switch Function: 2 Channels

Sales Area: EU/ US/ AU

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi/ Bluetooth/ Zigbee

Working Temperature: –10°C to 40°C

Max Wattage: 3 A

Operation Environment: Indoor

Mounting Support: Built-in Switch Box or Hang on Wall

Load Type: AC Motor

Material: PCB + ABS

Product Color: White/Blue/Purple/Black/Customized Color

Wiring Configuration: AC Power Supplier

Product Dimensions: 46 x 46 x 18 mm


[Back to Table of Contents →](#)

Wi-Fi + Bluetooth Smart Switch Module

[Register and inquire to learn more →](#)



Bluetooth network connection




Power off memory




Multi-control association




Hide in the wire box to save installation space



Traditional switch and smart switch independent control, non-interfering



Can use as 1 gang 2 way switch, 2 switches control 1 same Lamp

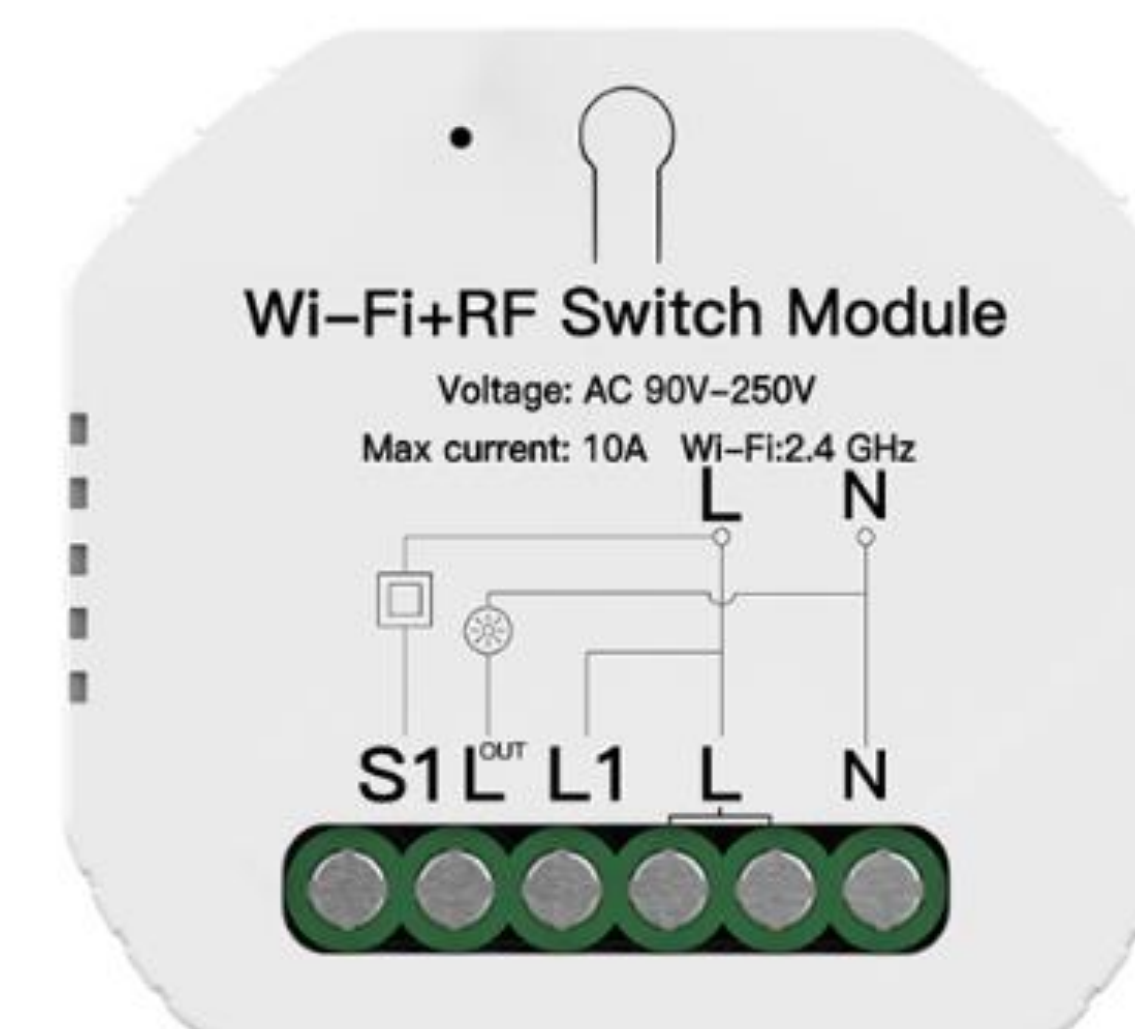

Certificate: CE/ RoHS/ FCC

Button Type: Touch/ Button/ Rocker/ Reset

Max Current: 10 A (Max)

Standards: EN Standard

Switch Function: Single Pole/ 3-Way

Sales Area: EU

Voltage: 100-240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: -10°C to 45°C

Max Wattage: 2200 W

Operation Environment: Indoor

Mounting Support: Embedded Installation

Load Type:
Resistive Load/
Inductive Load

Material: ABS

Product Color: White

Wiring Configuration: AC Power Supply

Product Dimensions: 52 x 47 x 18 mm


[Back to Table of Contents →](#)

App Control Dimmer Switch Module


[Register and inquire to learn more →](#)




Hide in the wire box to save installation space



Traditional switch and smart switch independent control, non-interfering



Can use as 2 way switch, 2 switches control 1 same lamp

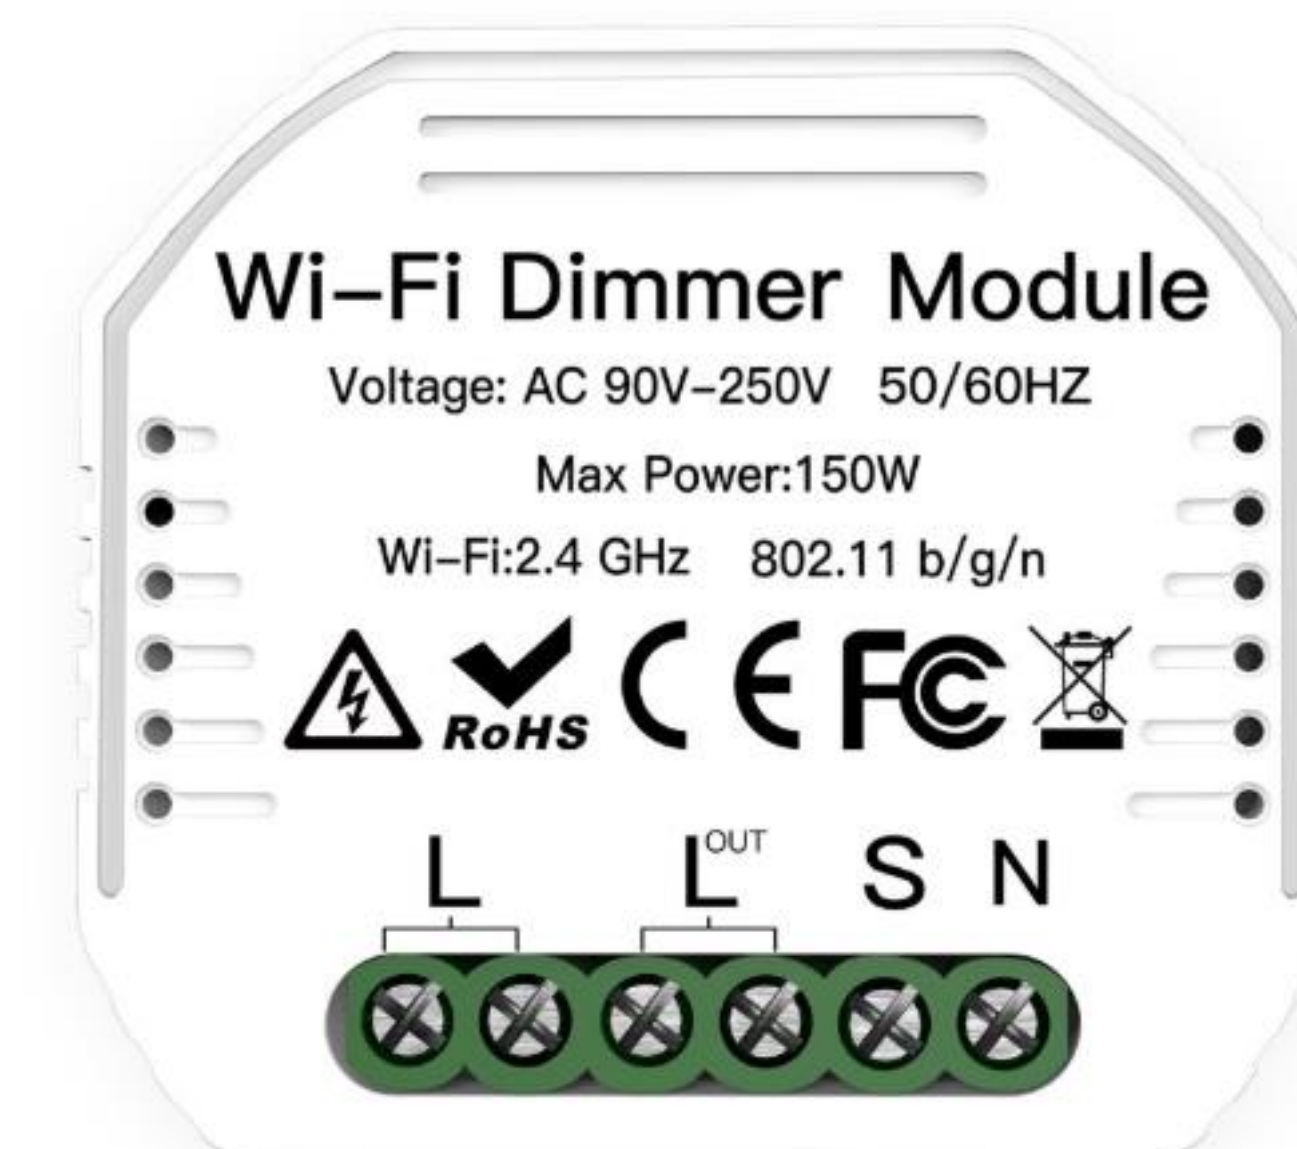

Certificate: CE/ RoHS/ FCC

Button Type: Reset

Max Current: 0.8 A

Standards: EN Standard

Switch Function: Single Pole/ 3-Way

Sales Area: EU

Voltage: 100-240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: -10°C to 45°C

Max Wattage: 150 W (220 V)

Operation Environment: Indoor

Mounting Support: Embedded Installation

Load Type: Resistive Load

Material: ABS

Product Color: White

Wiring Configuration: AC Power Supply

Product Dimensions: 52 x 47 x 18 mm


[Back to Table of Contents →](#)

Wi-Fi Curtain Switch Module


[Register and inquire to learn more →](#)




Hide in the wire box to save installation space



Traditional switch and smart switch independent control, non-interfering



Can RF433 remote control

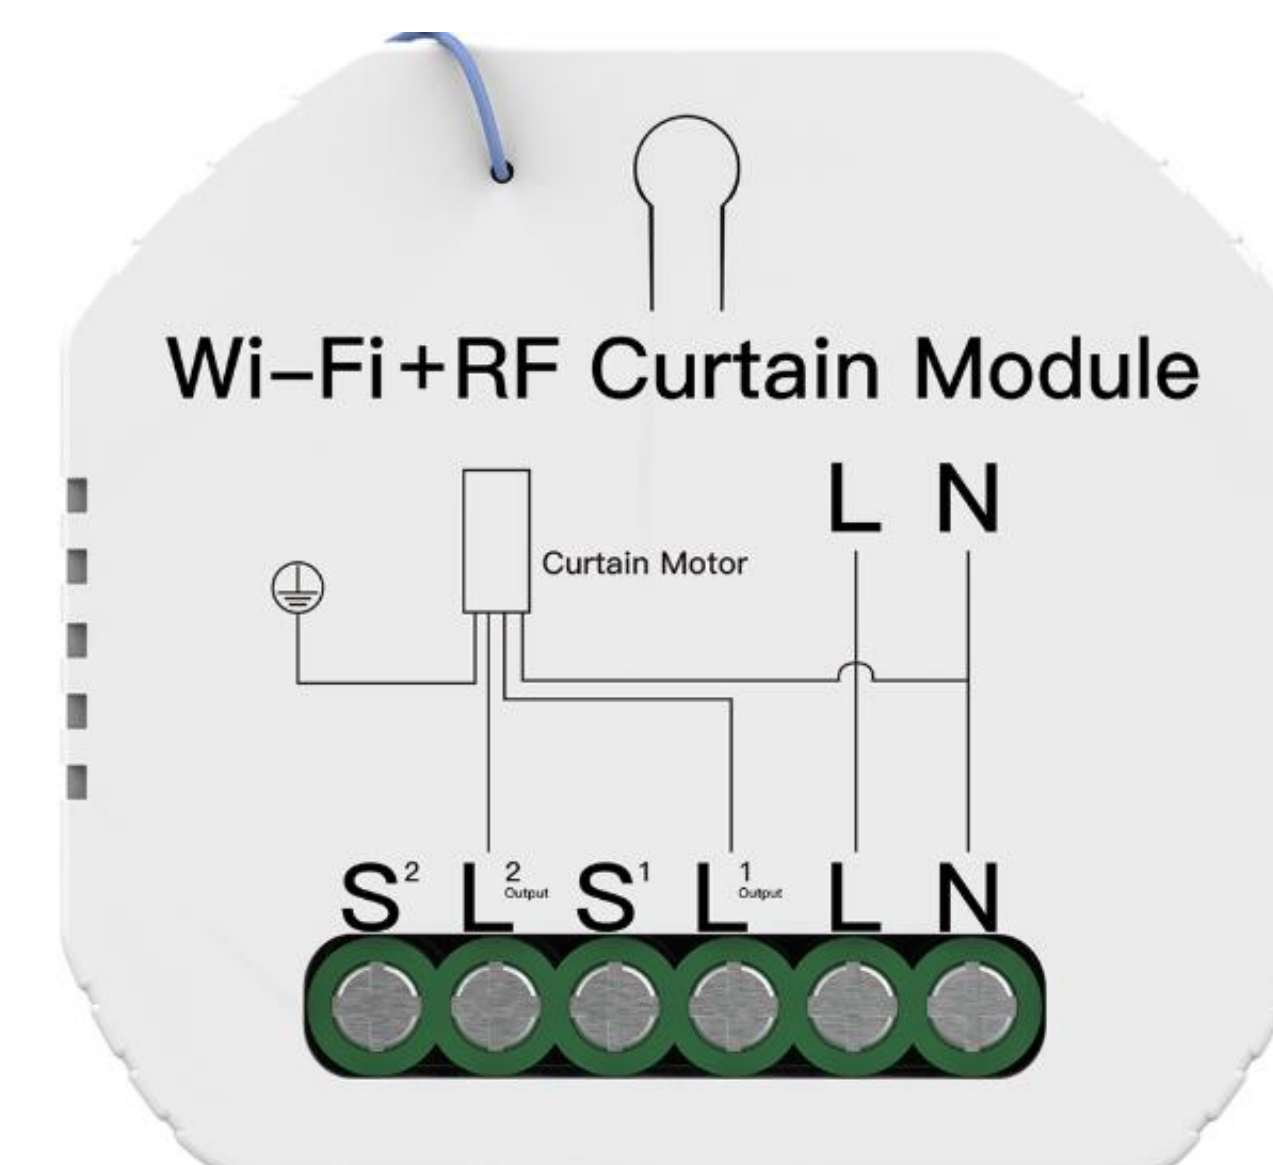

Certificate: CE/ RoHS/ FCC

Button Type: Touch/ Button/ Rocker/ Reset

Max Current: 2 A

Standards: EN Standard

Switch Function: Single Pole/ 3-Way

Sales Area: EU

Voltage: 100–240 V AC, 50/ 60 Hz

Protocol: Wi-Fi

Working Temperature: –10°C to 45°C

Max Wattage: 440 W (220 V)

Operation Environment: Indoor

Mounting Support: Embedded Installation

Load Type:
Resistive Load/
Inductive Load

Material: ABS

Product Color: White


Wiring Configuration: AC Power Supply

Product Dimensions: 52 x 47 x 18 mm

[Back to Table of Contents →](#)

Smart Water/ Irrigation Timer


[Register and inquire to learn more →](#)



Solar panel power with RF gateway




Real timer feedback




Irrigate with percentage from 0%-100% with 5% accuracy



Google and alexa assistant, voice irrigation



Timer with irrigation schedule from Monday and Sunday. Irrigate any time and place



Group member sharing



Certificate: CE/ FCC/ RCM

Pressure: 16 Bar

Max Current: /

Standards: BSTP and NPT Standard

Number of Zones: Unlimited

Sales Area: US/ European Markets

Voltage: 5 V DC

Protocol: RF + Wi-Fi

Working Temperature: -5°C to 65°C

Max Wattage: 5 V DC

Operation Environment: Outdoor

Mounting Support: DIY Male and Female Thread Connecting

Water Volume:
DN15 = 2.5 m³/H
DN20 = 5 m³/H
DN25 = 7.5 m³/H

Material: PP

Product Color: White and Black


Wiring Configuration: 2 x AA Battery

Product Dimensions: 175 x 165 x 125 mm


[Back to Table of Contents →](#)

Smart Water Controller

[Register and inquire to learn more →](#)



Solar panel power with RF gateway



Irrigate with percentage from 0%-100% with 5% accuracy




Timer with irrigation schedule from Monday and Sunday. Irrigate any time and place



Real timer feedback



Google and alexa assistant, voice irrigation



Group member sharing



Certificate: CE/ FCC/ RCM

Pressure: 16 Bar

Max Current: /

Standards: BSTP and NPT Standard

Number of Zones: Unlimited

Sales Area: US/ European Markets

Voltage: 5 V DC

Protocol: Wi-Fi

Working Temperature: -5°C to 65°C

Max Wattage: 5 V DC

Operation Environment: Outdoor

Mounting Support: DIY Male and Female Thread Connecting

Water Volume:
DN15 = 2.5 m³/H
DN20 = 5 m³/H
DN25 = 7.5 m³/H

Material: PP

Product Color: White and Black

Wiring Configuration: 5 V 1 A

Product Dimensions: 175 x 165 x 125 mm

[Back to Table of Contents →](#)

Smart Home Automation Wireless Wi-Fi Water Valve Intelligent Water Shut Off Valve Tuya Control

[Register and inquire to learn more →](#)



Easy to Install – No need for professional plumbing



Allow automatic, remote on mobile phone or manual shut on/off function. Save your home from flooding quickly




Work with water sensors to detect leaks, pipe breaks, frost temperature, and unusual water flow



Come in request sizes for various pipe types (1/2" , 3/4" , 1" , & 1 1/4")



Infinitely Expandable – Can add as many leak detectors as required to protect any building



Flow rate can be set from 0-100% on app to limit water waste



Work with Google Home and Alexa



Certificate: NSF

Pressure: 1.0M pa

Max Current: 2 A (Max)

Standards:
BSP Standard
NPT Standard

Number of Zones: /

Sales Area: All Country

Voltage: 5 V

Protocol: Wi-Fi

Working Temperature: -30°C to 60°C

Max Wattage: 10 W

Operation Environment: Indoor

Mounting Support:
This controller can be installed over the existing shut off bulld and
of valve. Installation is very easy and is DIY.

Water Volume: Adjustable

Material: SS304 & Engineering Plastics

Product Color: Green or OEM

Wiring Configuration: USB Cable

Product Dimensions: 68 x 68 x 85 mm

[Back to Table of Contents →](#)

New Style Automatic Water Valves Water Shut Off Zigbee Tuya Water Valve Controller

[Register and inquire to learn more →](#)



Easy to Install – No need for professional plumbing



Allow automatic, remote on mobile phone or manual shut on/off function. Save your home from flooding quickly




Work with water sensors to detect leaks, pipe breaks, frost temperature, and unusual water flow



Come in request sizes for various pipe types (1/2" , 3/4" , 1" , & 1 1/4")



Infinitely Expandable – Can add as many leak detectors as required to protect any building



Flow rate can be set from 0-100% on app to limit water waste



Work with Google Home and Alexa



Certificate: NSF

Pressure: 1.0M pa

Max Current: 2 A (Max)

Standards:
BSP Standard
NPT Standard

Number of Zones: /

Sales Area: All Country

Voltage: 5 V

Protocol: Zigbee

Working Temperature: -30°C to 60°C

Max Wattage: 10 W

Operation Environment: Indoor/ Outdoor

Mounting Support:
This controller can be installed over the existing shut off bulld and valve. Installation is very easy and is DIY.

Water Volume: Adjustable

Material: SS304 & Engineering Plastics

Product Color: Green or OEM

Wiring Configuration: USB Cable

Product Dimensions: 68 x 68 x 85 mm

[Back to Table of Contents →](#)

Smart Sectional Garage Door Opener

[Register and inquire to learn more →](#)




Remote control existing garage door openers through app or voice; compatible with witgarage app and smart life app; the app can be customized



Notifications when door is open or closed, or opened for a long time




Set schedules, garage door can open according to your personal schedule



Allow multi-user access, and the device can be shared with family or friends



Easily install with wireless sensor



Only support sectional door



Using the witgarage app, you can use GPS to automatically open the door when back home, or close the door when you leave home



Using the witgarage app, work with Tuya camera, it will open the camera preview when you operate the door



Certificate: SAA

Protocol: Wi-Fi

Sales Area:

North America/ South America/ Australia/ Middle East/ Europe

Standards: US, AU, ER, UK Standard

Operation Environment: Garage

Working Temperature: -10°C to 55°C

Voltage: 100-240 V AC, 50/ 60 Hz

Material: ABS

Mounting Support:

Controller plug in socket

Sensor is stick on garage door by 3 M tape.

Max Wattage: 5 W

Product Dimensions:

Controller: 106 x 60 x 34 mm

Size of the Sensor: 71 x 31 x 15 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)

[Back to Table of Contents →](#)

Smart Garage Door Opener With Wire

[Register and inquire to learn more →](#)




Remote control existing garage door openers through app or voice; compatible with witgarage app and smart life app; the app can be customized



Notifications when door is open or closed, or opened for a long time



Set schedules, garage door can open according to your personal schedule



Allow multi-user access, and the device can be shared with family or friends



Wired sensor, need more time to install and wiring. Default package with 5 meters wire and mounting brackets



Support different type doors



Using the witgarage app, you can use GPS to automatically open the door when back home, or close the door when you leave home



Using the witgarage app, work with Tuya camera, it will open the camera preview when you operate the door



Certificate: No

Protocol: Wi-Fi

Sales Area:

North America/ South America/ Australia/ Middle East/ Europe

Standards: US, AU, ER, UK Standard

Operation Environment: Garage

Working Temperature: -10°C to 55°C

Voltage: 100-240 V AC, 50/ 60 Hz

Material: ABS

Mounting Support:

Controller plug in socket
Sensor is stick on garage door by 3 M tape.

Max Wattage: 5 W

Product Dimensions:

Controller: 95 x 52 x 30 mm
Size of the Sensor: 63 x 12 x 13 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)


[Back to Table of Contents →](#)

3 – Garage–Door Opener


[Register and inquire to learn more →](#)



Remote control existing garage door openers through app or voice




Set schedules



Allow multi-user access



Easily install with wireless sensor



Support sectional door with default sensor



GPS automatically open or close



Camera preview when you operate the door with Tuya camera



Certificate: CE/ FCC/ SAA

Protocol: Wi-Fi

Sales Area:

North America/ South America/ Australia/ Middle East/ Europe

Standards: US, AU, ER, UK Standard

Operation Environment: Garage

Working Temperature: -10°C to 55°C

Voltage: 100–240 V AC, 50/ 60 Hz

Material: ABS

Mounting Support:

Screw the bracket on wall. Mount the device in bracket.

Max Wattage: 5 W

Product Dimensions:

Controller: 115 x 73 x 30 mm

Size of the Sensor: 78 x 40 x 17 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)


[Back to Table of Contents →](#)

Smart Garage Door Opener


[Register and inquire to learn more →](#)



Remote control existing garage door openers through app or voice



Set schedules



Allow multi-user access



Easily install with wireless sensor



Support sectional door with default sensor



GPS automatically open or close



Camera preview when you operate the door with Tuya camera



Certificate: CE/ FCC/ SAA

Protocol: Wi-Fi

Sales Area:

North America/ South America/ Australia/ Middle East/ Europe

Standards: US, AU, ER, UK Standard

Operation Environment: Garage

Working Temperature: -10°C to 55°C

Voltage: 100-240 V AC, 50/ 60 Hz

Material: ABS

Mounting Support:

Controller plug in socket
Sensor is stick on garage door by 3 M tape.

Max Wattage: 5 W

Product Dimensions:

Controller: 115 x 73 x 30 mm
Size of the Sensor: 78 x 40 x 17 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)

[Back to Table of Contents →](#)

Smart Garage Door Opener

[Register and inquire to learn more →](#)




Remote control existing garage door openers through app or voice; compatible with witgarage app and smart life app; the app can be customized



Notifications when door is open or closed, or opened for a long time




Set schedules, garage door can open according to your personal schedule



Allow multi-user access, and the device can be shared with family or friends



Easily install with wireless sensor



Using the witgarage app, it will alarm with sound and light when operate the door.



Using the witgarage app, you can use GPS to automatically open the door when back home, or close the door when you leave home



Using the witgarage app, work with Tuya camera, it will open the camera preview when you operate the door



Certificate: CE/ FCC/ SAA

Protocol: Wi-Fi

Sales Area:

North America/ South America/ Australia/ Middle East/ Europe

Standards: US, AU, ER, UK Standard

Operation Environment: Garage

Working Temperature: -10°C to 55°C

Voltage: 100-240 V AC, 50/ 60 Hz

Material: ABS

Mounting Support:

Screw the bracket on wall. Mount the device in bracket.

Max Wattage: 5 W

Product Dimensions:

Controller: 115 x 73 x 30 mm

Size of the Sensor: 78 x 40 x 17 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)

[Back to Table of Contents →](#)

Wi-Fi Smart Garage Door Opener Remote Switch

[Register and inquire to learn more →](#)




Open and close control support remote control, while support local control



Voice control supports voice control through Alexa and Google Assistant



Alarm notice can open the door for a long time, to ensure the safety of the garage



Automatic control automatic home, home open and close control



Certificate:
US/ CA/ FCC
EU/ CE/ RoHS

Protocol: Wi-Fi

Sales Area: EU

Standards: EN Standard

Operation Environment: Garage

Working Temperature: 0°C to 40°C(32°F to 104°F)

Voltage: 100–240 V AC, 50/ 60 Hz

Material: PC

Mounting Support: Wall-Mounted

Max Wattage: 500 W

Product Dimensions: 87 x 40 x 23mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)

[Back to Table of Contents →](#)

Smart Garage Door Opener

[Register and inquire to learn more →](#)




Open and close control support remote control, while support local control



Voice control supports voice control through Alexa and Google Assistant



Alarm notice can open the door for a long time, to ensure the safety of the garage



Automatic control automatic home, home open and close control



Certificate:
US/ CA/ FCC
EU/ CE/ RoHS

Protocol: Wi-Fi

Sales Area: EU

Standards: EN Standard

Operation Environment: Garage

Working Temperature: 0°C to 40°C(32°F to 104°F)

Voltage: 100–240 V AC, 50/ 60 Hz

Material: PC

Mounting Support: Wall-Mounted

Max Wattage: 500 W

Product Dimensions: 87 x 40 x 23mm

Product Color: White


Motor Type: Most General-Purpose Motors

Max Current: 1 A (Max)

[Back to Table of Contents →](#)

Smart Garage Door Opener

[Register and inquire to learn more →](#)



Easy to Install

Just connect it to your existing garage door opener! Connect the device with the Smart Life/Tuya Smart app



Universal

Easy-to-add functionality to upgrade your existing garage door opener



Certificate: FCC

Protocol: Wi-Fi, Bluetooth

Sales Area: USA European/ Southeast Asia/ South America

Standards: Global

Operation Environment: Garage

Working Temperature: 0°C to 60°C

Voltage: 5 V DC

Material: PC

Mounting Support: Wall-Mounted

Max Wattage: 5 W

Product Dimensions: 105 x 40 x 25 mm

Product Color: White

Motor Type: Most General-Purpose Motors

Max Current: 1 A



Tuya Inc.

vip@tuya.com



[@TuyaB2B](#)



[@TuyaB2B](#)



[@TuyaB2B](#)



[@TuyaB2B](#)

Copyright © 2014-2020 Tuya Inc.

All rights reserved.